



EVERYTHING under THE SUN

Trading Internationally since 1980

We are committed

to replacing all AC street light in the world with solar
street lights,

becoming the leading new energy lighting solutions
service provider.



EVERYTHING under THE SUN


<http://AsianDragonIntl.com>



SOLAR STREET LIGHT



SOLAR FLOOD LIGHT

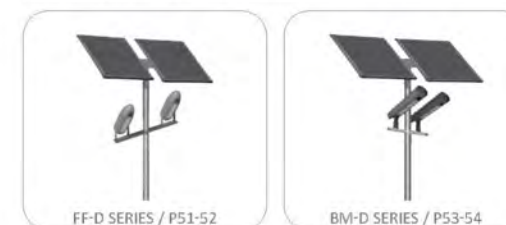

SOLAR GARDEN LIGHT



SOLAR POWERED CAMERA



SOLAR LIGHTING COLUMN



FP-A

SOLAR STREET LIGHT






Application


- Residential roads
- Remote Areas and Rural Roads
- Parks and Plazas
- Schools and Campuses
- Industrial Areas and Factories
- Waterfronts and Dock Areas
- Pathways
- Countryard
- Parking Lots

Model	FP-D1A~FP-06A
LED Power	10W-40W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-80W/18V
LiFePO4 Lithium Battery	153.6WH/12AH 12.8V-384WH/30AH 12.8V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

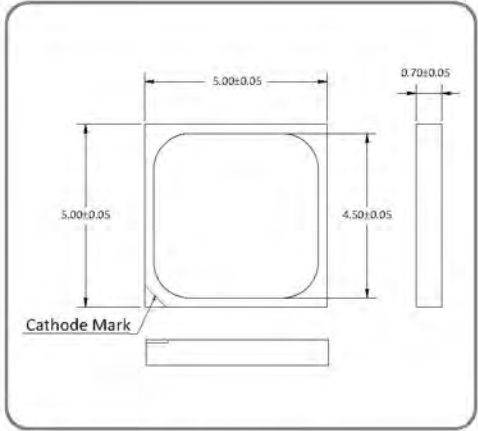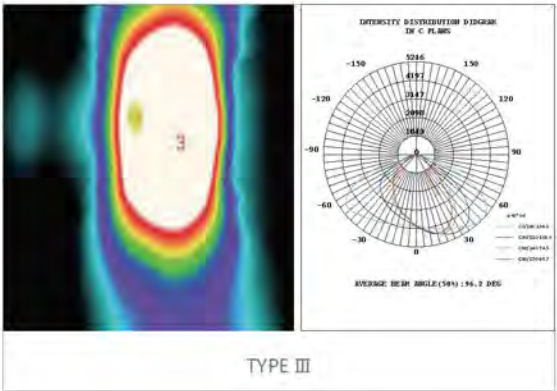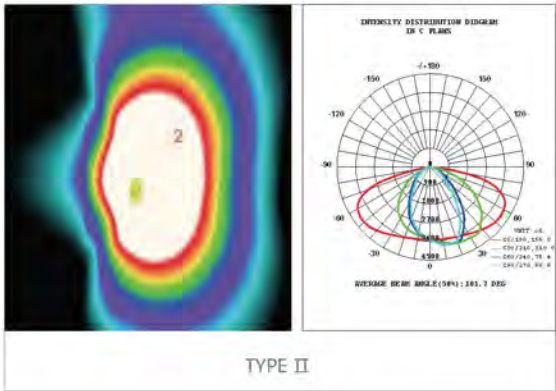

LED Chip Dimension

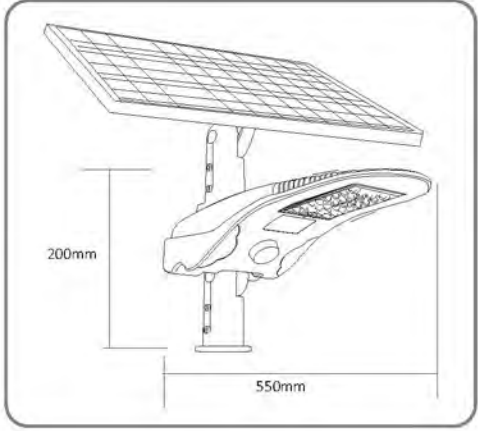

Lamp Dimension

FP-B
SOLAR STREET LIGHT






Application


- Residential roads
- Remote Areas and Rural Roads
- Parks and Plazas
- Schools and Campuses
- Industrial Areas and Factories
- Waterfronts and Dock Areas
- Pathways
- Countryard
- Parking Lots

Model	FP-01A~FP-06A
LED Power	10W-40W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-80W/18V
LiFePO4 Lithium Battery	153.6WH/12AH 12.8V-384WH/30AH 12.8V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

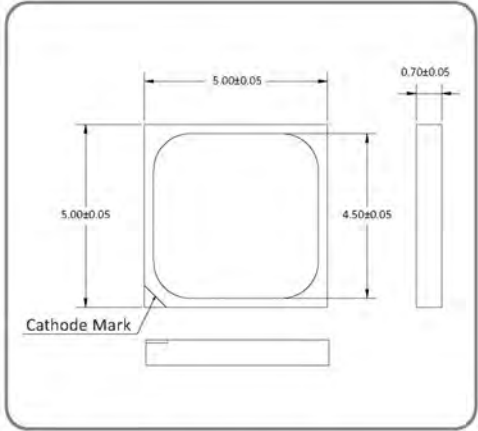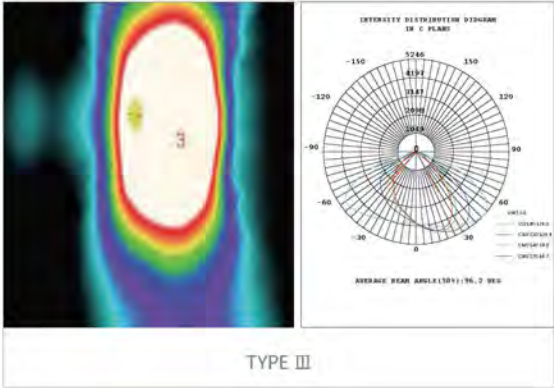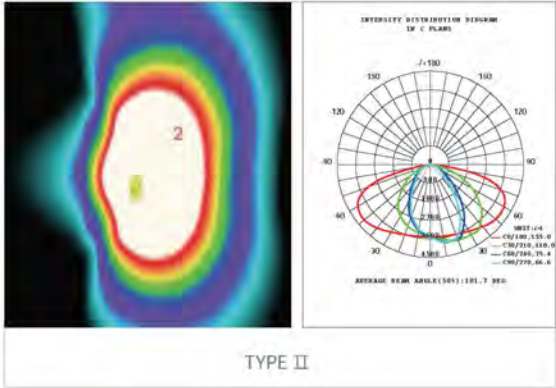


LED Chip Dimension

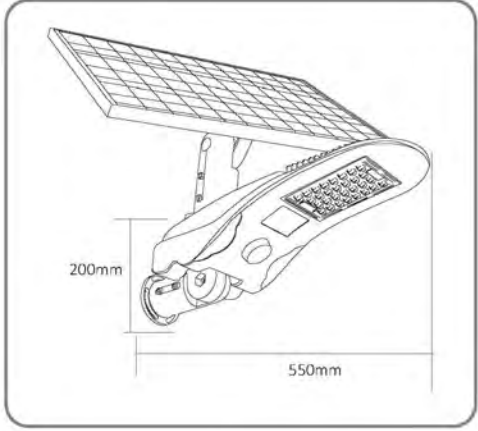

Lamp Dimension

FP-C
SOLAR STREET LIGHT



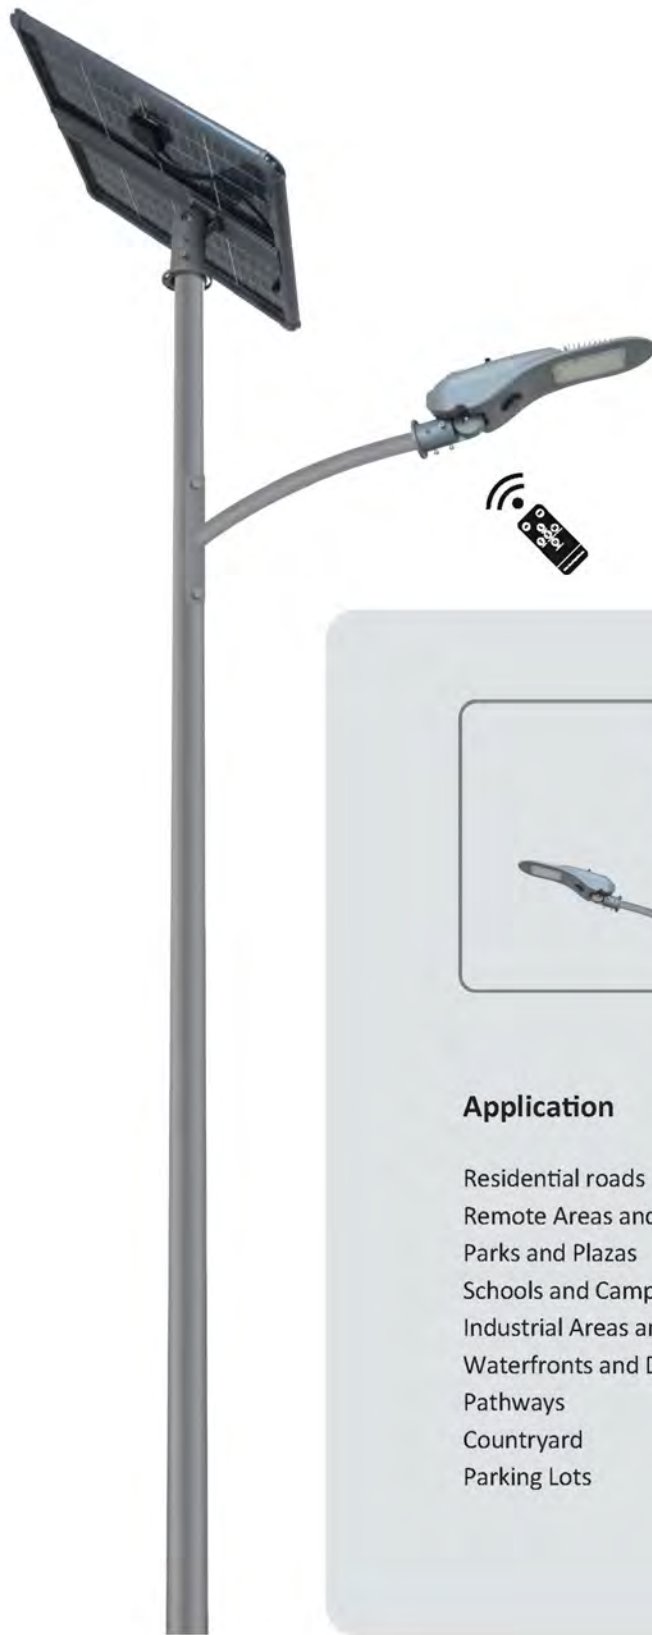


Application


- Residential roads
- Remote Areas and Rural Roads
- Parks and Plazas
- Schools and Campuses
- Industrial Areas and Factories
- Waterfronts and Dock Areas
- Pathways
- Countryard
- Parking Lots

Model	FP-01A~FP-06A
LED Power	10W-40W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-80W/18V
LiFePO4 Lithium Battery	153.6WH/12AH 12.8V-384WH/30AH 12.8V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

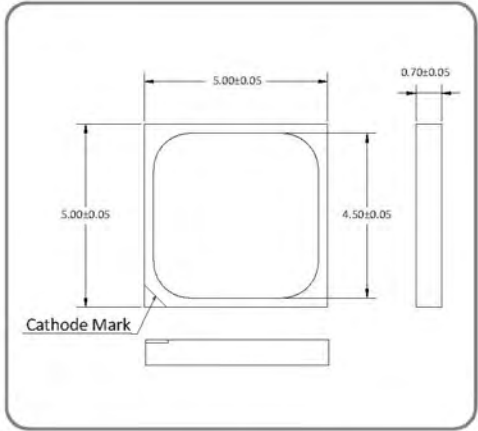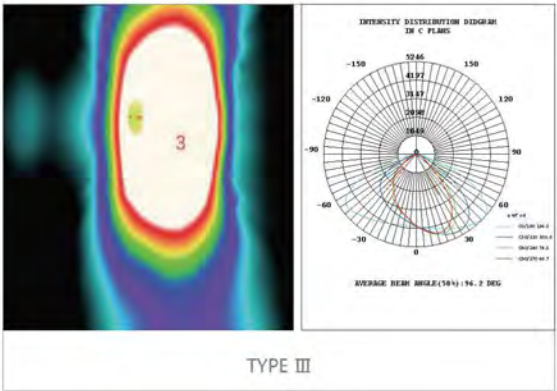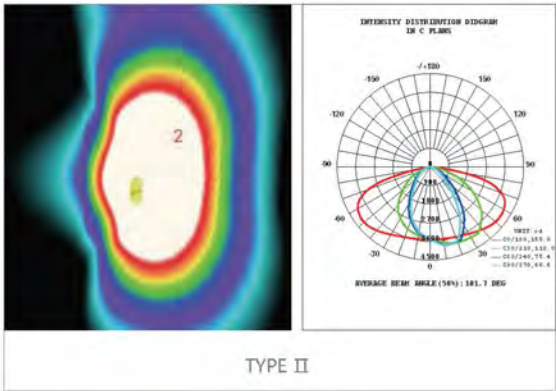

LED Chip Dimension

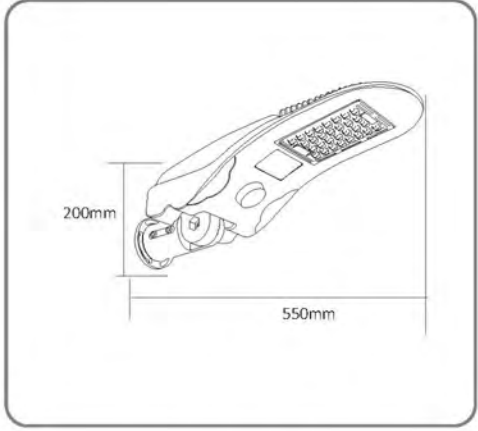

Lamp Dimension

SF-A
SOLAR STREET LIGHT





Application


- Residential roads
- Remote Areas and Rural Roads
- Parks and Plazas
- Schools and Campuses
- Industrial Areas and Factories
- Waterfronts and Dock Areas
- Pathways
- Countryard
- Parking Lots

Model	SF-10~SF-60
LED Power	10W-60W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-120W/36V
LiFePO4 Lithium Battery	153.6WH/12AH 12.8V-537.6WH/21AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

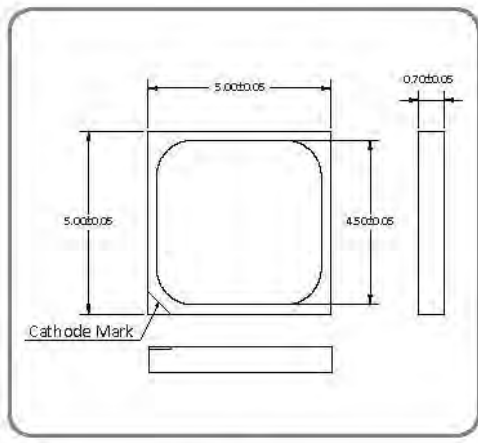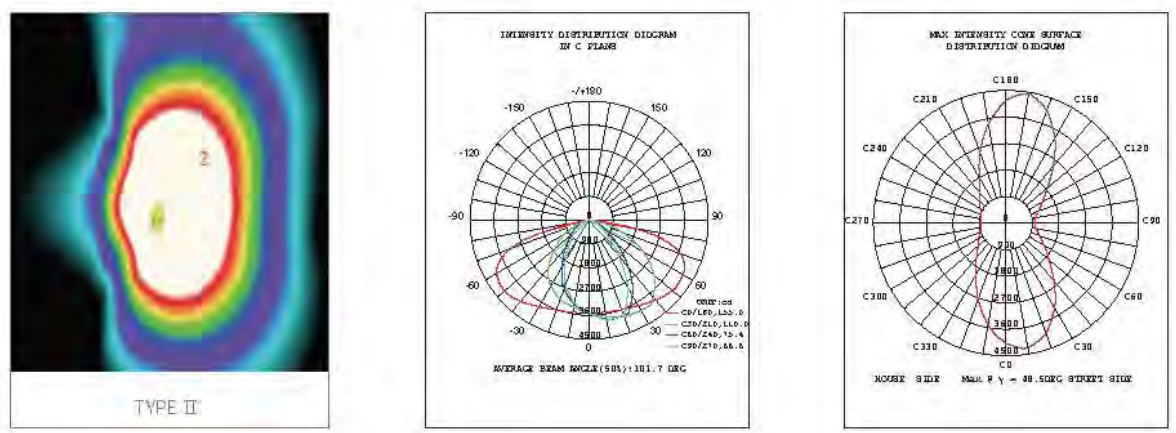

LED Chip Dimension

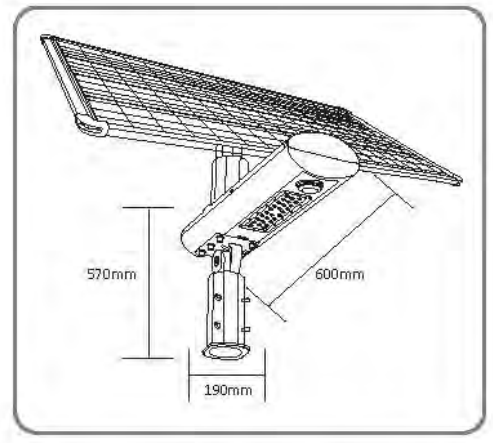

Lamp Dimension



SF-B

SOLAR STREET LIGHT




Model	SF-10~SF-60
LED Power	10W-60W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-120W/36V
LiFePO4 Lithium Battery	153.6WH/12AH 12.8V-537.6WH/21AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

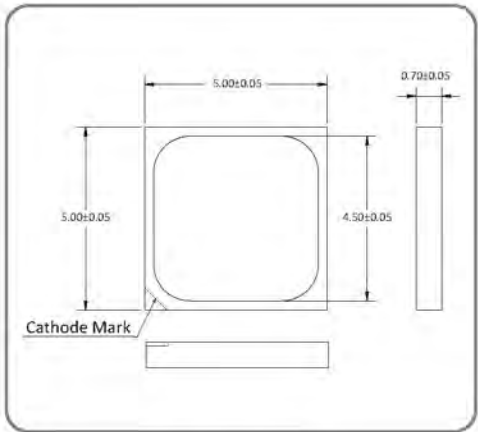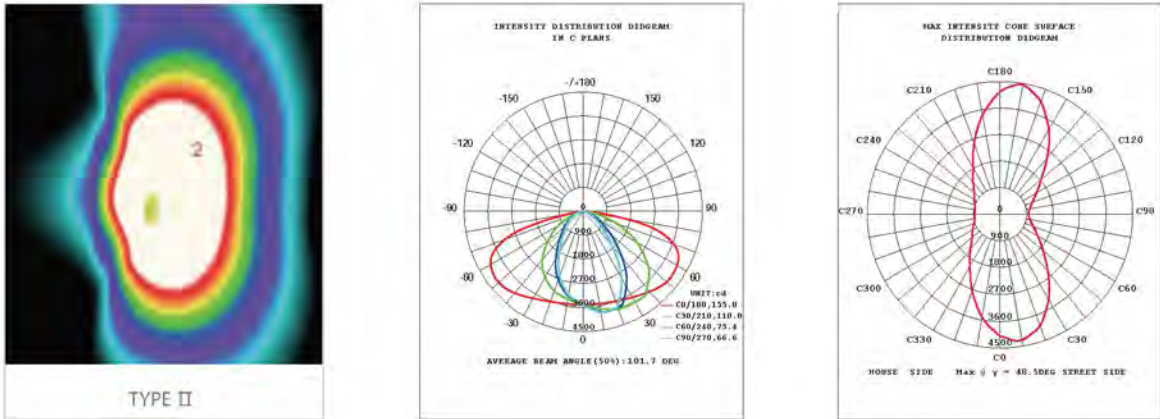

LED Chip Dimension

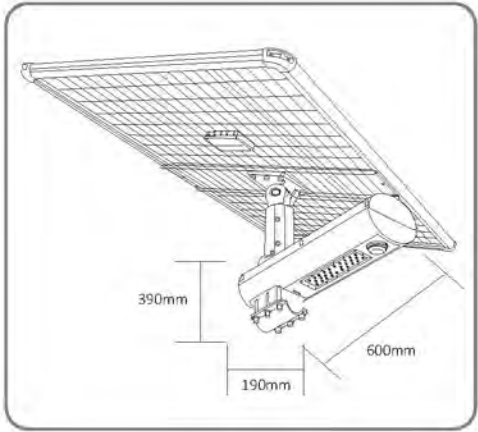

Lamp Dimension

SF-C
SOLAR STREET LIGHT




Application




- Residential roads
- Remote Areas and Rural Roads
- Parks and Plazas
- Schools and Campuses
- Industrial Areas and Factories
- Waterfronts and Dock Areas
- Pathways
- Countryard
- Parking Lots

Model	SF-10~SF-60
LED Power	10W-60W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-120W/36V
LiFePO4 Lithium Battery	153.6WH/12AH 12.8V-537.6WH/21AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years


Optional Type Level (default is TYPE II)

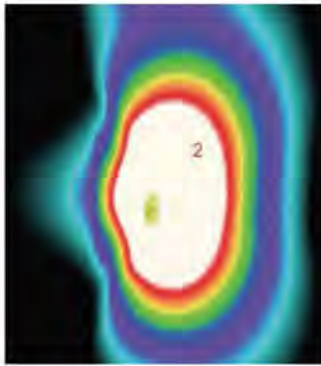

TYPE II

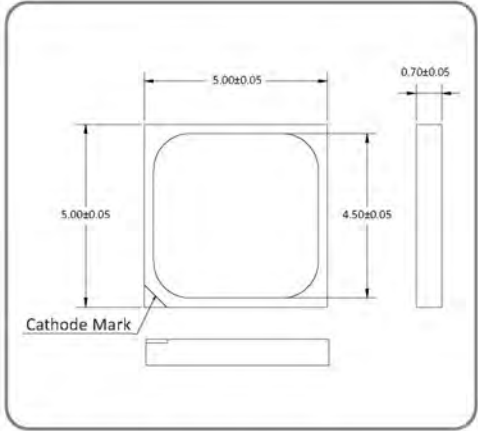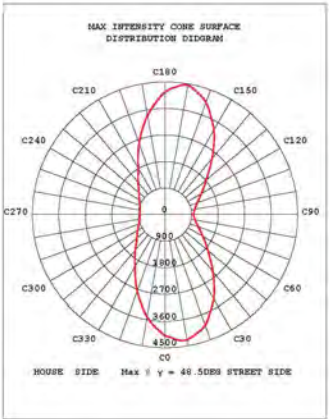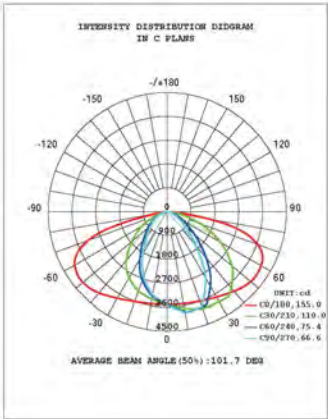

LED Chip Dimension

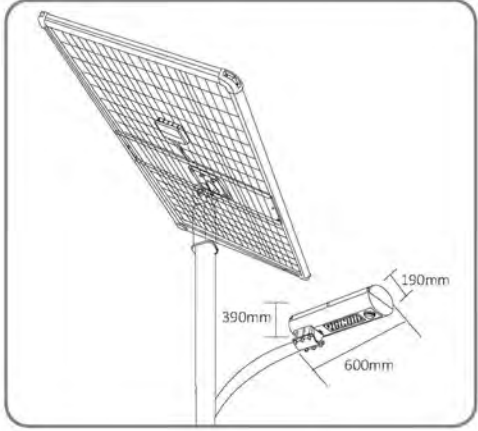



Lamp Dimension

PB-A
SOLAR STREET LIGHT




Model	PB-40~PB-100
LED Power	40W-100W
CCT	2500K-6500K
Mono Solar Panel	80W/18V-200W/36V
LiFePO4 Lithium Battery	384WH/30AH 12.8V-921.6WH/36AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

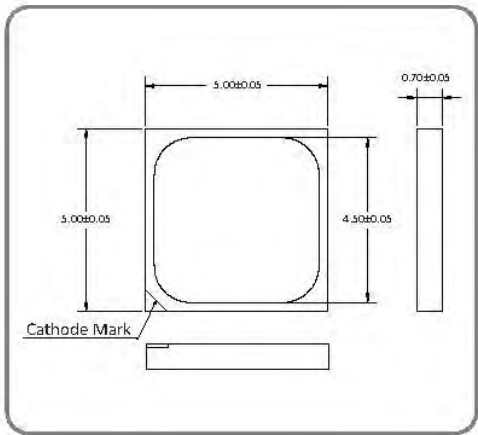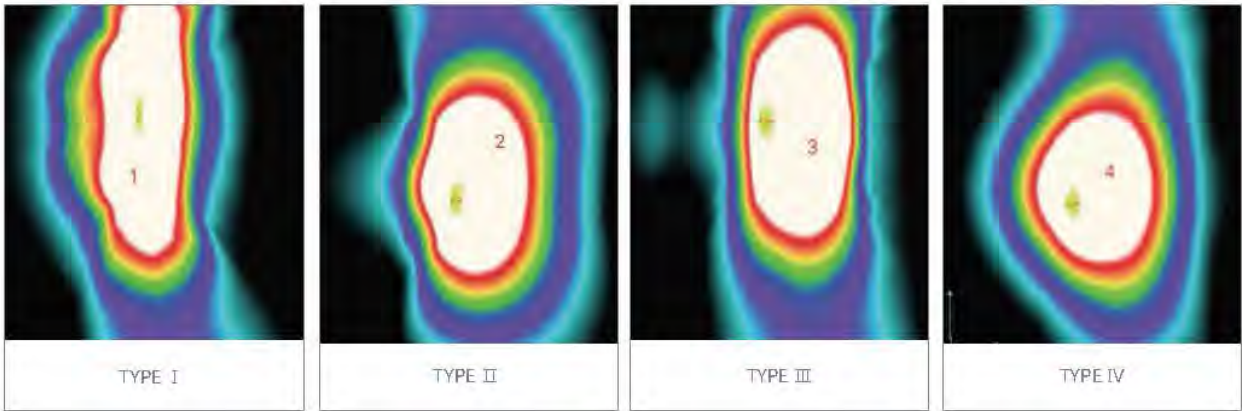

LED Chip Dimension

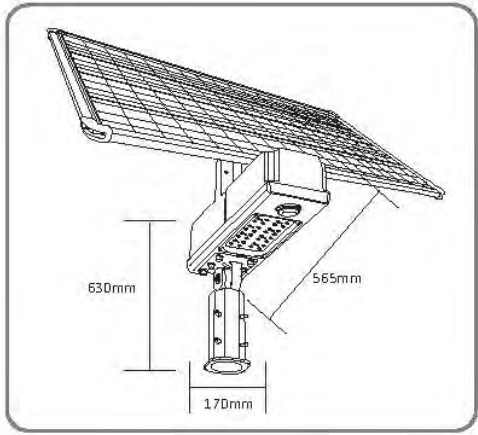

Lamp Dimension

PB-B
SOLAR STREET LIGHT





Application


- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Bicycle lane / Path
- Parking Lots
- Park
- Square
- Military installation

Model	PB-40~PB-100
LED Power	40W-100W
CCT	2500K-6500K
Mono Solar Panel	80W/18V-200W/36V
LiFePO4 Lithium Battery	384WH/30AH 12.8V-921.6WH/36AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

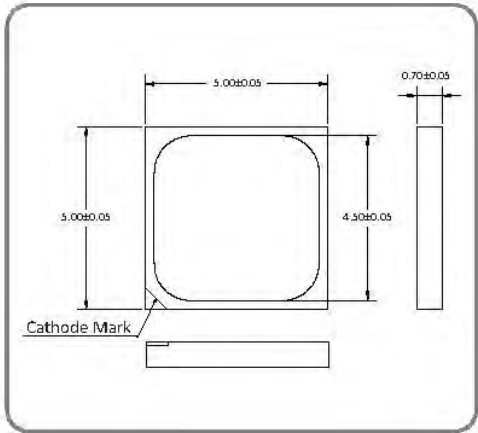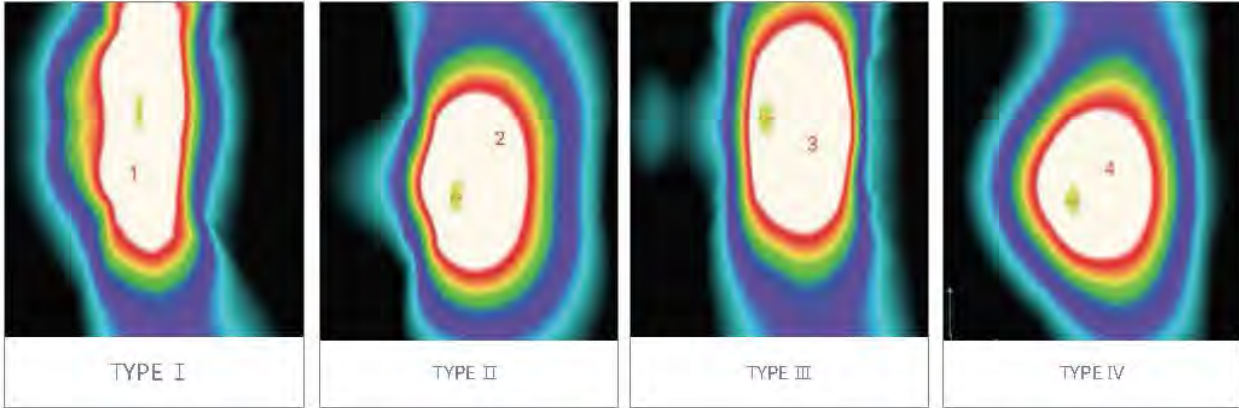

LED Chip Dimension

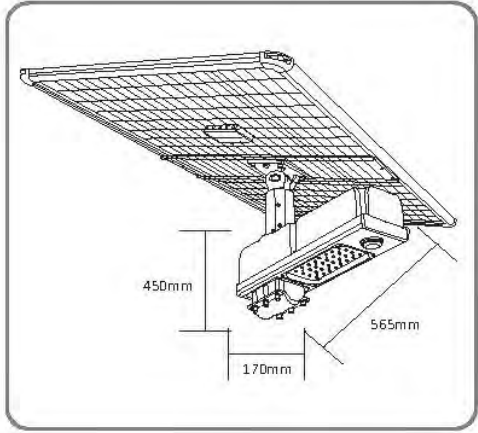

Lamp Dimension

PB-C
SOLAR STREET LIGHT




Application


- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Bicycle lane / Path
- Parking Lots
- Park
- Square
- Military installation

Model	PB-40~PB-100
LED Power	40W-100W
CCT	2500K-6500K
Mono Solar Panel	80W/18V-200W/36V
LiFePO4 Lithium Battery	384WH/30AH 12.8V-921.6WH/36AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years


Optional Type Level (default is TYPE II)




TYPE I




TYPE II




TYPE III



TYPE IV

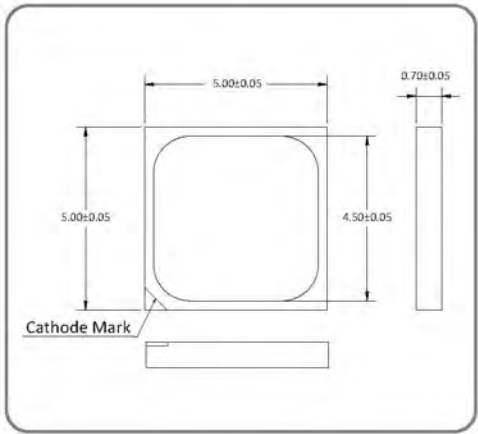

LED Chip Dimension

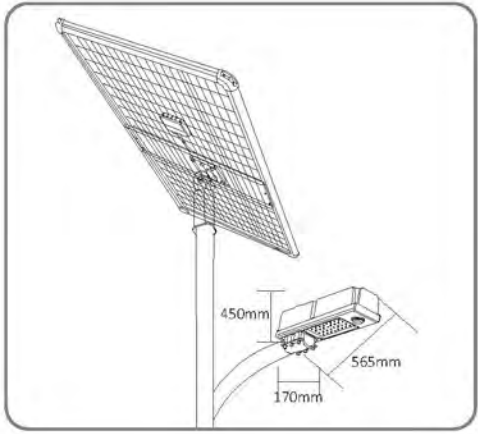

Lamp Dimension

FH-A
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	BS-FH-40~BS-FH-120
LED Power	40W-120W
CCT	2500K-6500K
Mono Solar Panel	80W/18V-250W/36V
LiFePO4 Lithium Battery	384WH/30AH 12.8V-1075.2WH/42AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

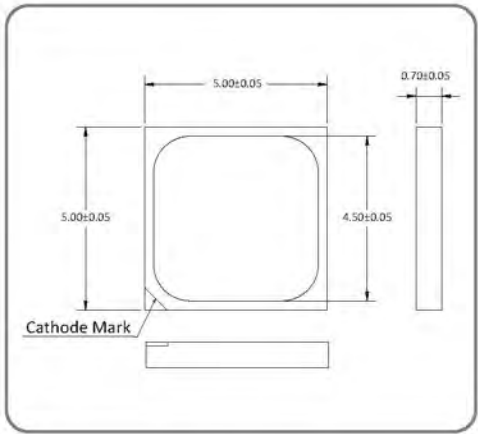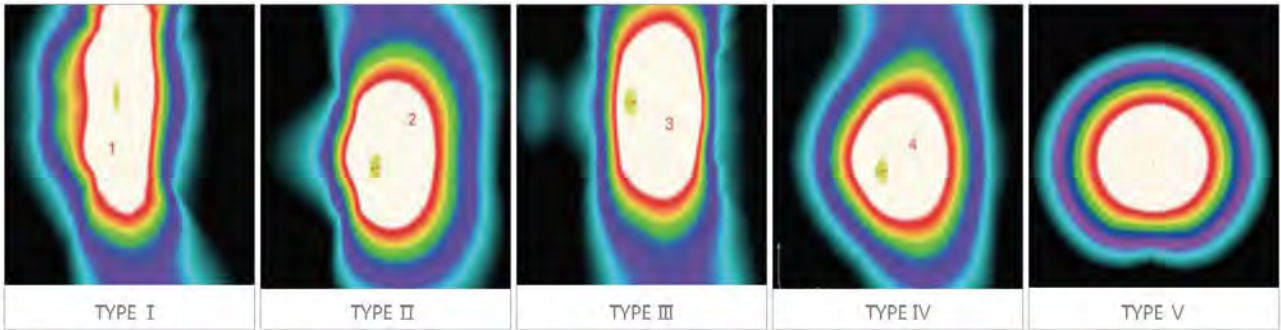

LED Chip Dimension

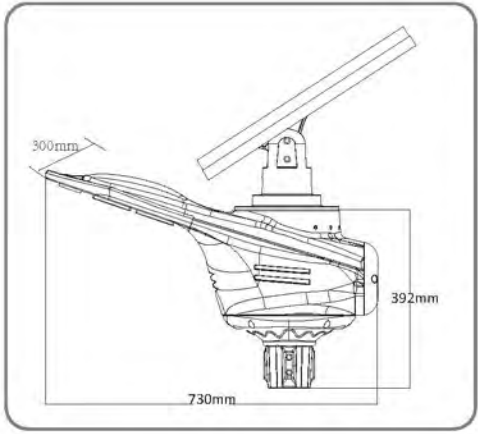

Lamp Dimension

SW-B
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	BS-SW-40~BS-SW-120
LED Power	40W-120W
CCT	2500K-6500K
Mono Solar Panel	80W/18V-250W/36V
LiFePO4 Lithium Battery	384WH/30AH 12.8V-1075.2WH/42AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

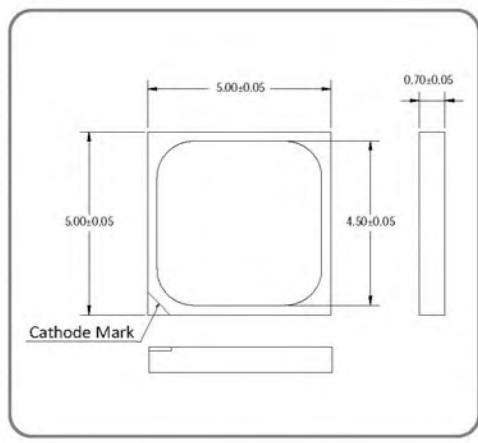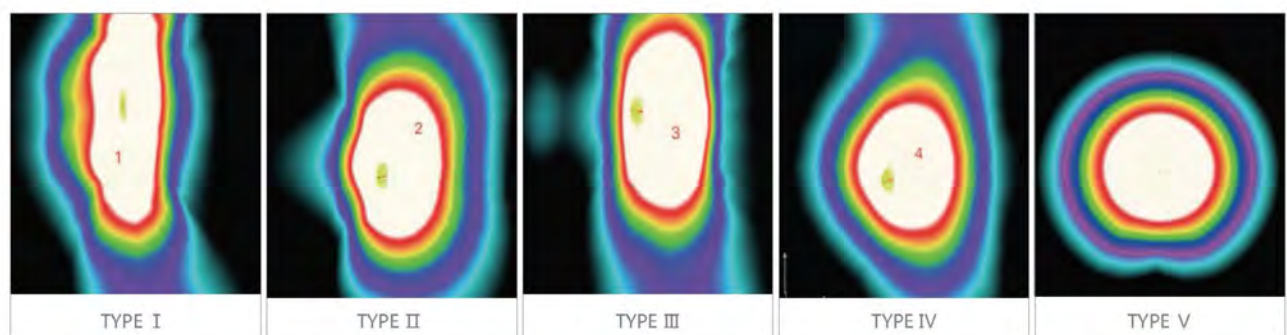

LED Chip Dimension

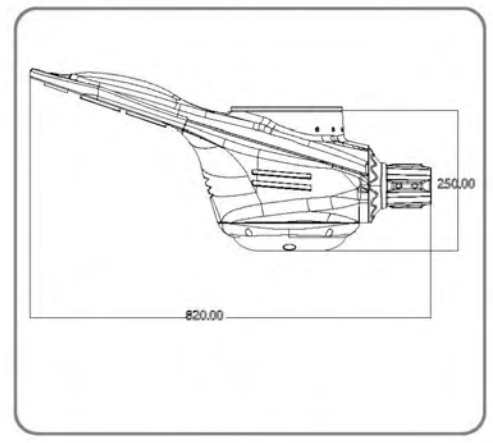

Lamp Dimension

SW-C
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	BS-SW-150-BS-SW-180
LED Power	150W-180W
CCT	2500K-6500K
Mono Solar Panel	300W/36V-400W/36V
LiFePO4 Lithium Battery	1228.8WH/48AH 25.6V-1382.4WH/54AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

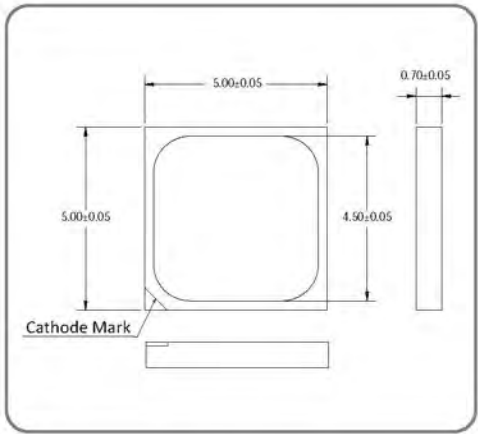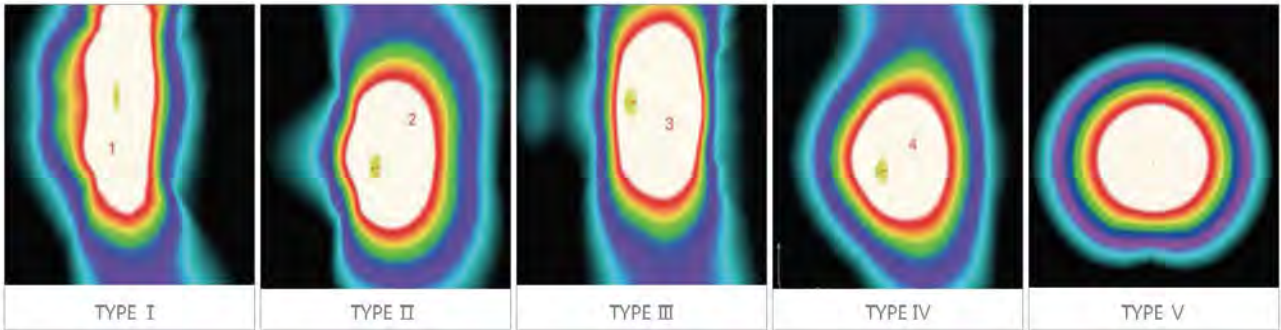

LED Chip Dimension

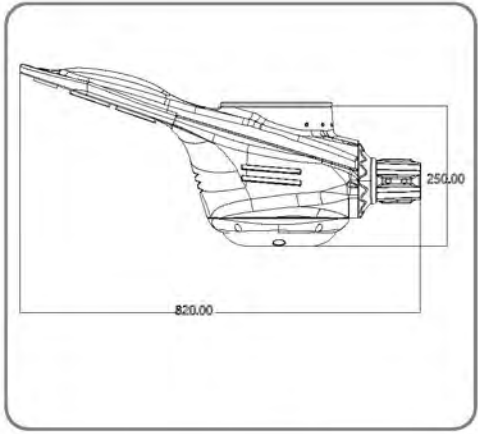

Lamp Dimension

BM-A SOLAR STREET LIGHT







Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	BM-60-BM-120
LED Power	60W-120W
CCT	2800K-6500K
Mono Solar Panel	120W/36V-250W/36V
LiFePO4 Lithium Battery	768WH/30AH 25.6V-1228.8WH/48AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

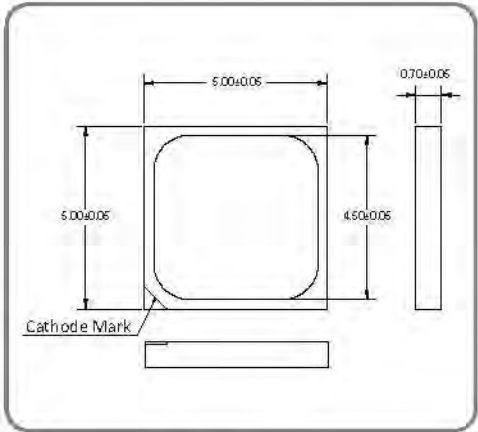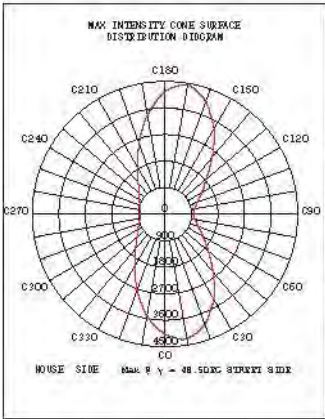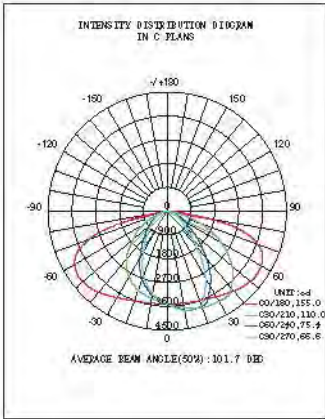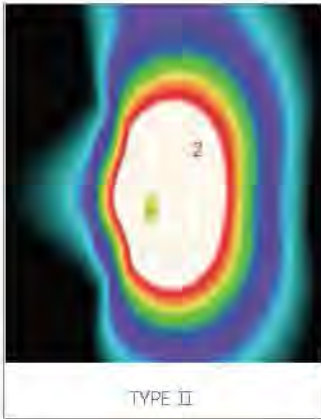

LED Chip Dimension

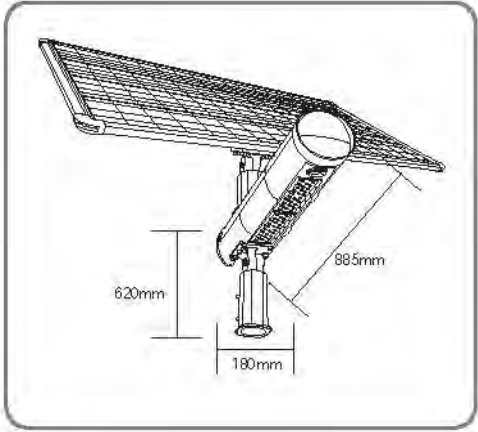

Lamp Dimension

BM-B

SOLAR STREET LIGHT







Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	BM-60-BM-120
LED Power	60W-120W
CCT	2500K-6500K
Mono Solar Panel	120W/36V-250W/36V
LiFePO4 Lithium Battery	768WH/30AH 25.6V-1228 8WH/48AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

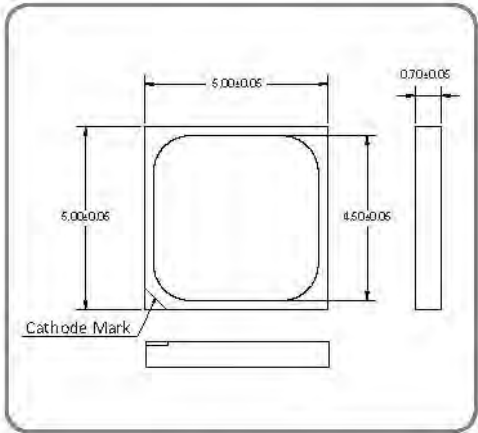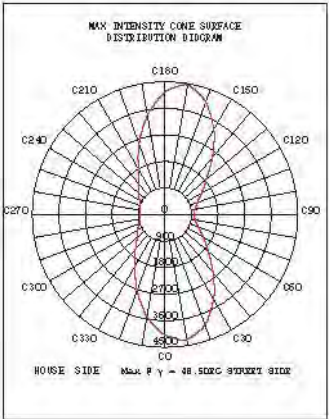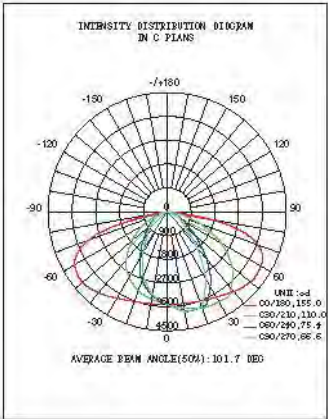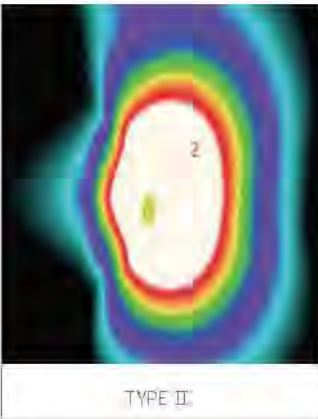

LED Chip Dimension

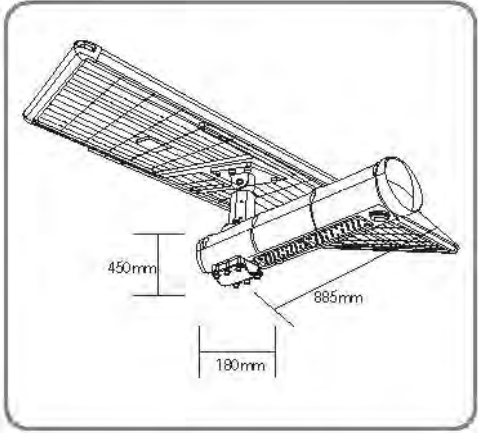

Lamp Dimension

BM-C
SOLAR STREET LIGHT




Application




- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	BM-150-BM-200
LED Power	150W-200W
CCT	2500K-6500K
Mono Solar Panel	300W/36V-500W/36V
LiFePO4 Lithium Battery	1382.4WH/54AH 25.6V-2150.4WH/84AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years


Optional Type Level (default is TYPE II)

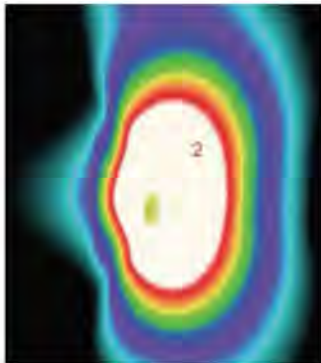

TYPE II

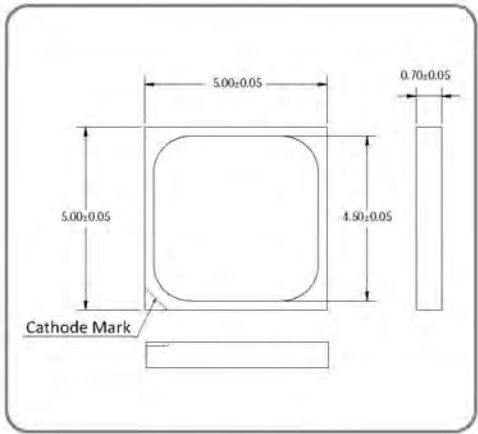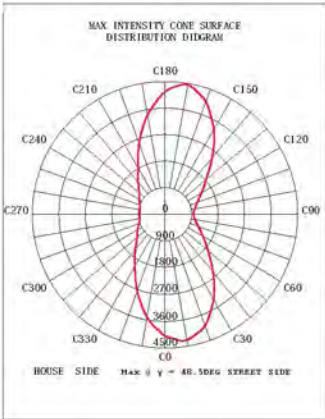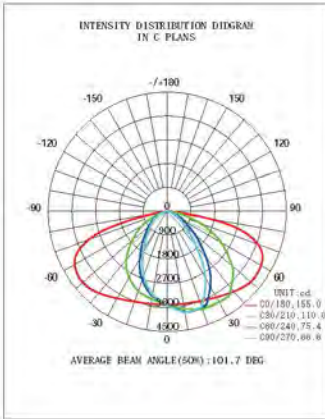

LED Chip Dimension

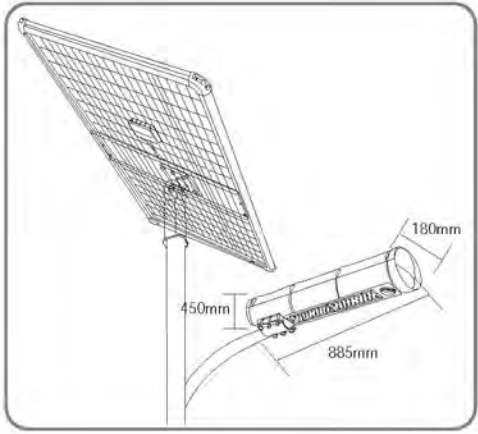

Lamp Dimension

SN-A
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	SN-50~SN-120
LED Power	50W-120W
CCT	2500K-6500K
Mono Solar Panel	100W/18V-250W/36V
LiFePO4 Lithium Battery	537.6WH/42AH 12.8V-1228.8WH/48AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

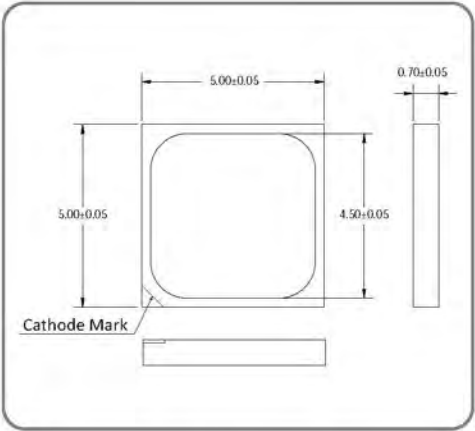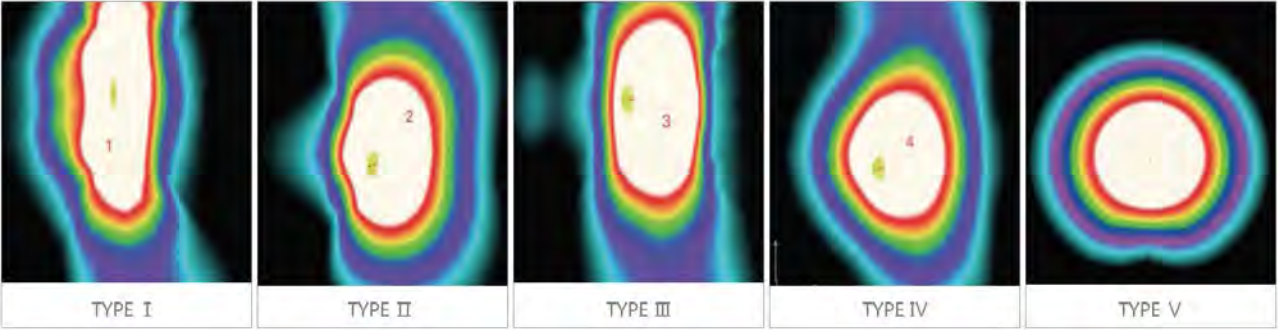

LED Chip Dimension

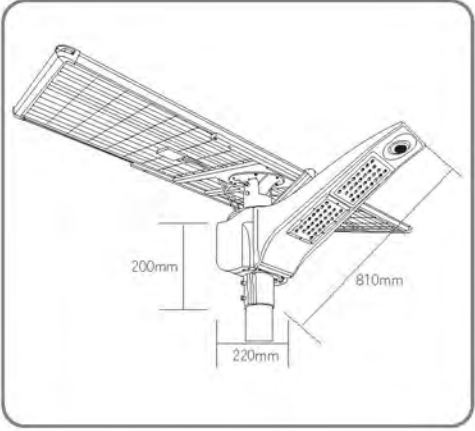

Lamp Dimension

SN-B
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	SN-50~SN-120
LED Power	50W-120W
CCT	2500K-6500K
Mono Solar Panel	100W/18V-250W/36V
LiFePO4 Lithium Battery	537.6WH/42AH 12.8V-1228.8WH/48AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

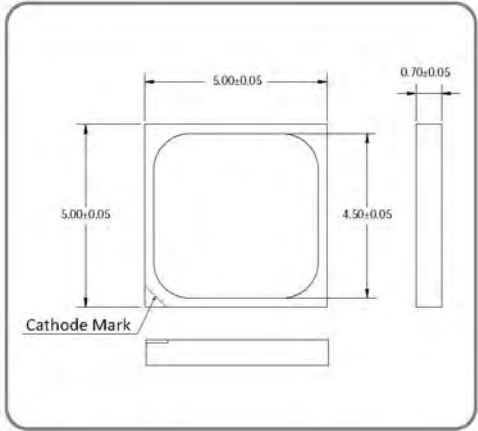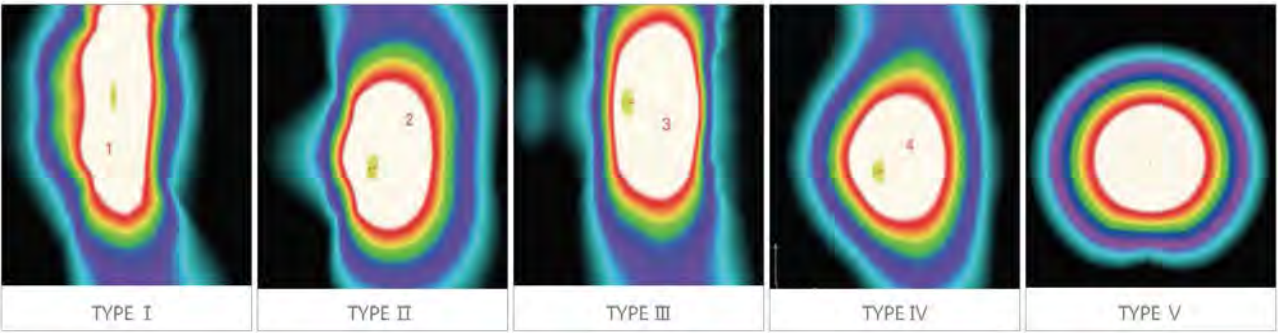

LED Chip Dimension

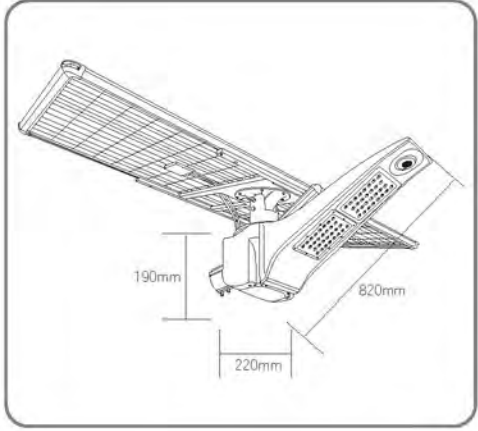

Lamp Dimension

SN-C
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	SN-150~SN-200
LED Power	150W-200W
CCT	2500K-6500K
Mono Solar Panel	100W/18V-250W/36V
LiFePO4 Lithium Battery	1382.4WH/54AH 25.6V-2150.4WH/84AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

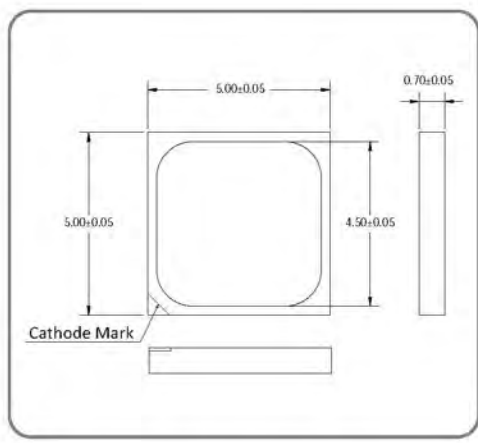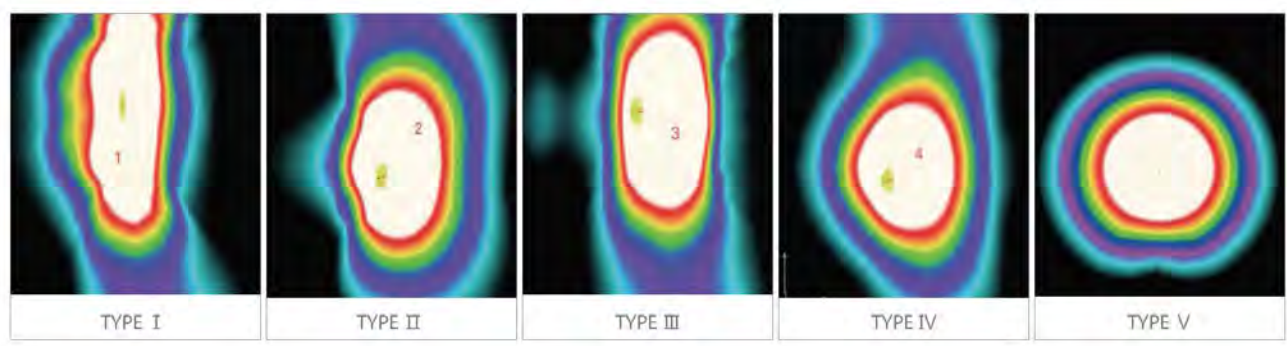

LED Chip Dimension

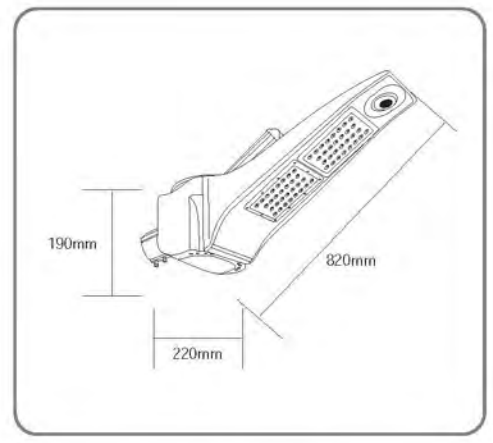



Lamp Dimension

P-A
SOLAR STREET LIGHT




Model	P-15-P-180
LED Power	15W-180W
CCT	2500K-6500K
Mono Solar Panel	50W/18V-400W/36V
LiFePO4 Lithium Battery	230.4WH/18AH 12.8V-1689.6WH/66AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

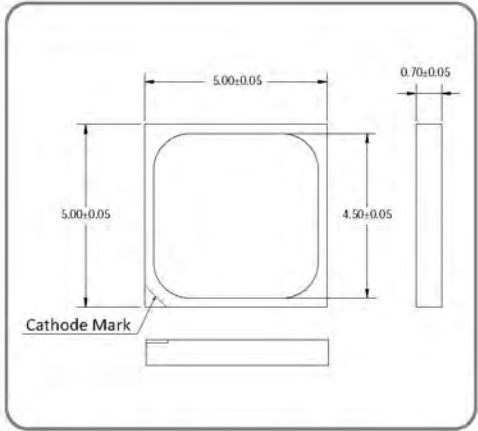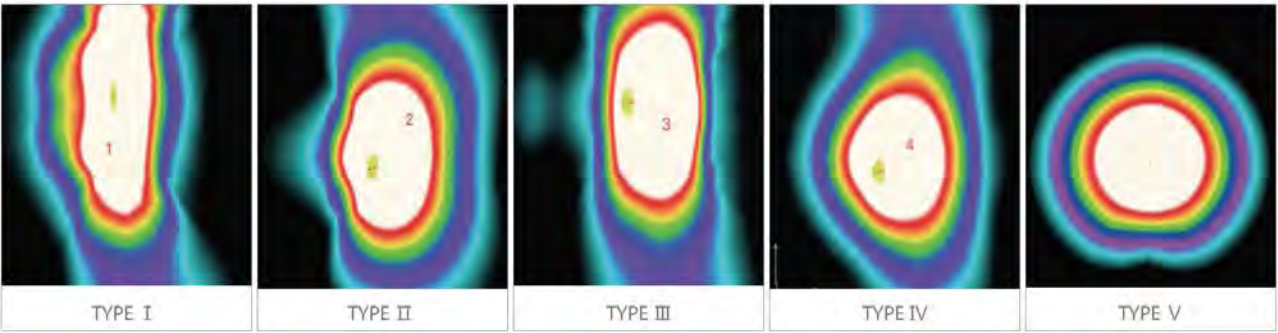

LED Chip Dimension

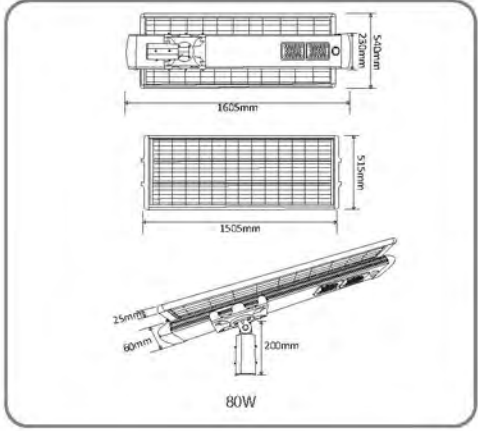

Lamp Dimension

P-B
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	P-40-P-180
LED Power	40W-180W
CCT	2500K-6500K
Mono Solar Panel	80W/18V-400W/36V
LiFePO4 Lithium Battery	460.8WH/36AH 12.8V-1689.6WH/66AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

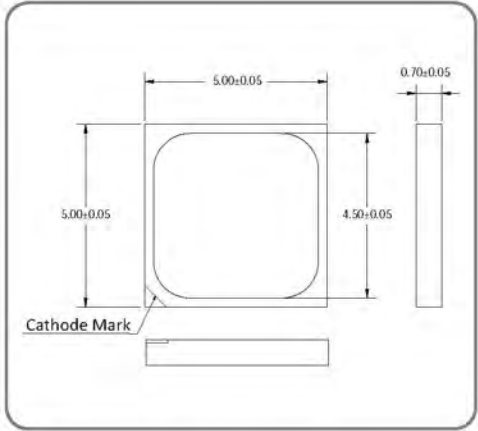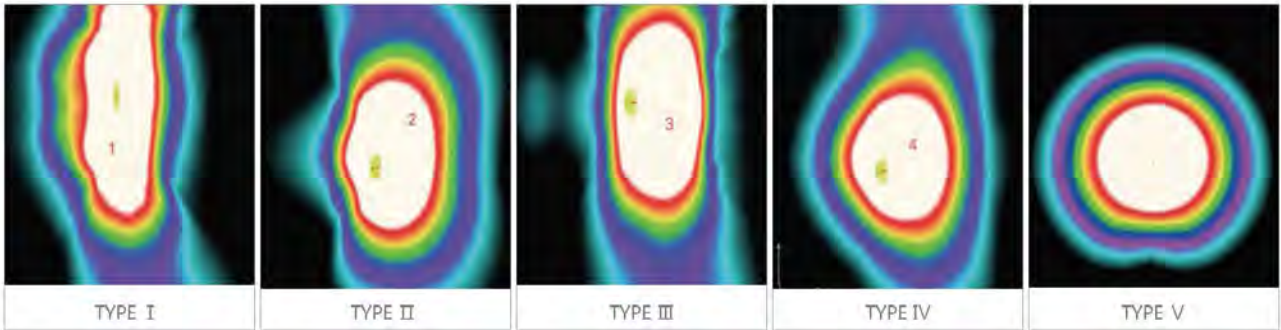

LED Chip Dimension

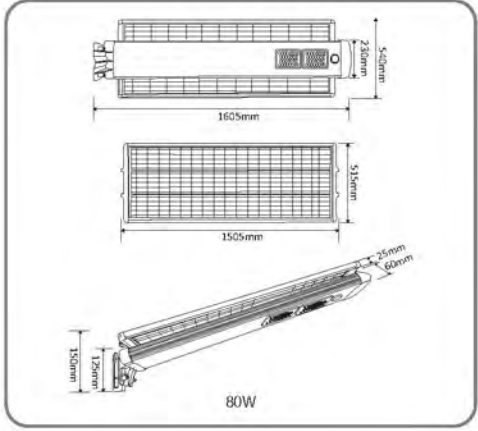

Lamp Dimension

P-C

SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	P-40-P-180
LED Power	40W-180W
CCT	2500K-6500K
Mono Solar Panel	80W/18V-400W/36V
LiFePO4 Lithium Battery	460.8WH/36AH 12.8V-1689.6WH/66AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Type Level (default is TYPE II)

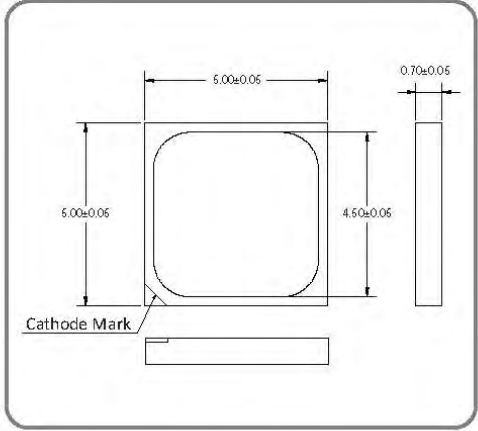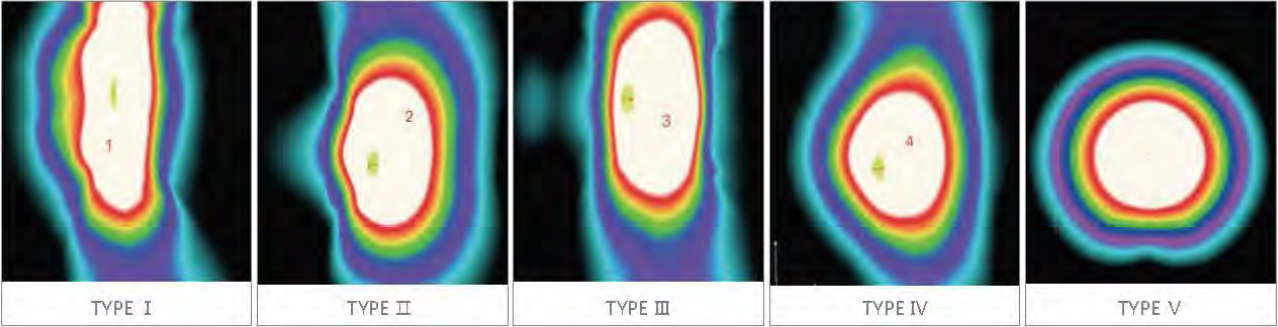

LED Chip Dimension

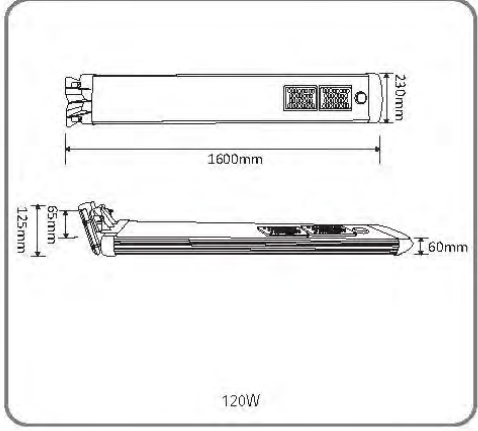

Lamp Dimension

AS-A
SOLAR STREET LIGHT




Application




- Residential roads
- Remote Areas and Rural Roads
- Parks and Plazas
- Schools and Campuses
- Industrial Areas and Factories
- Waterfronts and Dock Areas
- Pathways
- Countryard
- Parking Lots

Model	BS-AS-15-BS-AS-100
LED Power	15W-100W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-130W/18V
LiFePO4 Lithium Battery	192WH/15AH 12.8V-652.8WH/51AH 12.8V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years


Optional Type Level (default is TYPE II)

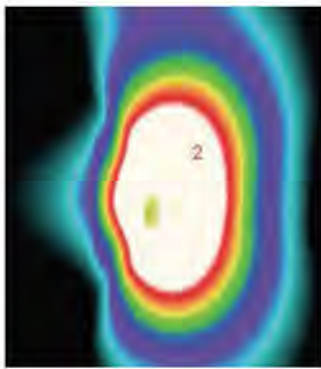

TYPE II

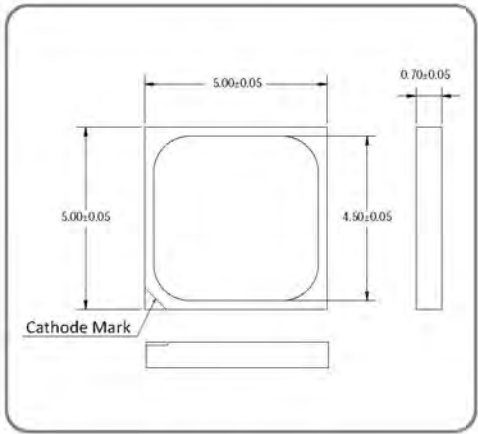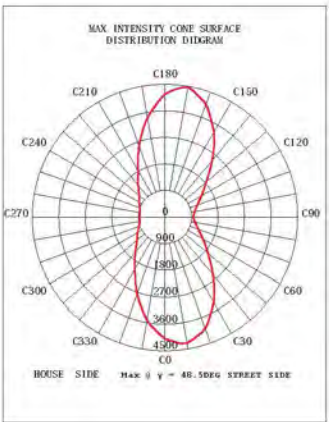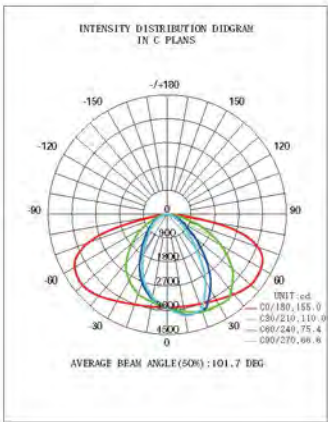

LED Chip Dimension

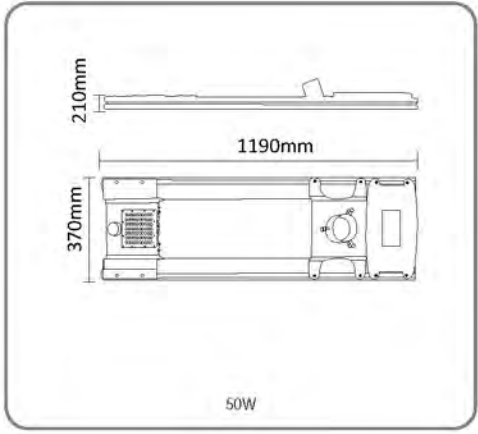

Lamp Dimension

AS-B
SOLAR STREET LIGHT




Application




- Residential roads
- Remote Areas and Rural Roads
- Parks and Plazas
- Schools and Campuses
- Industrial Areas and Factories
- Waterfronts and Dock Areas
- Pathways
- Countryard
- Parking Lots

Model	BS AS-15-BS AS-100
LED Power	15W-100W
CCT	2500K-6500K
Mono Solar Panel	40W/18V-130W/18V
LiFePO4 Lithium Battery	192WH/15AH 12.8V-652.8WH/51AH 12.8V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years


Optional Type Level (default is TYPE II)

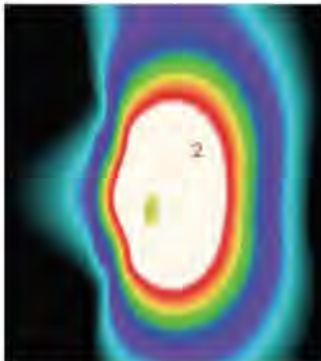

TYPE II

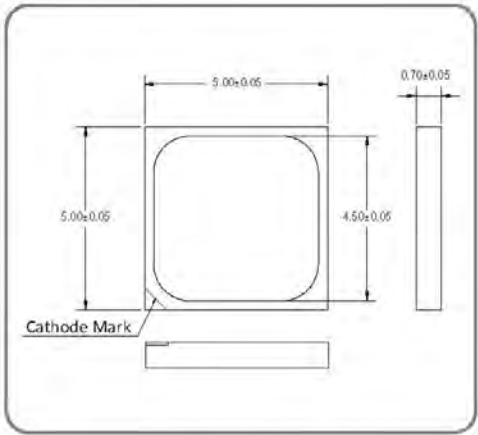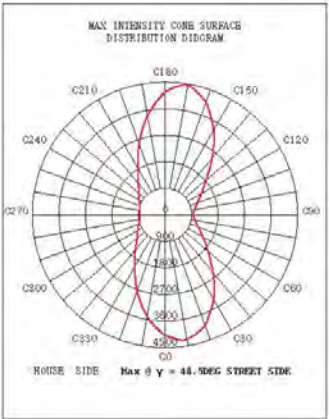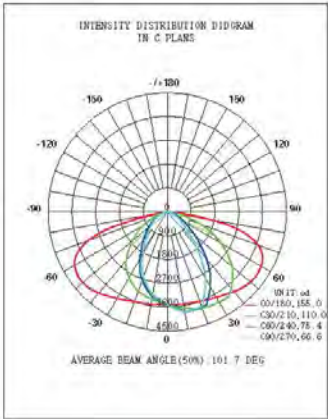

LED Chip Dimension

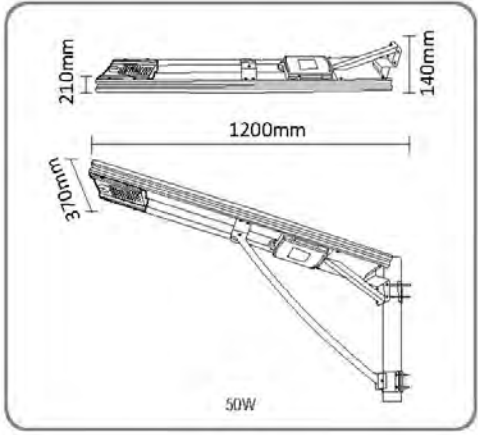

Lamp Dimension

SX-A
SOLAR STREET LIGHT





Application


- Highway
- Urban Roads and Streets
- Remote Areas and Rural Roads
- Residential Areas
- Tourist Attractions
- Military installation
- Industrial Areas and Factories
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	SX-40-SX-120
LED Power	40W-120W
CCT	2500K-6500K
Mono Solar Panel	120W/18V-250W/36V
LiFePO4 Lithium Battery	384WH/30AH 12.8V-1382.4WH/54AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Type Level (default is TYPE II)

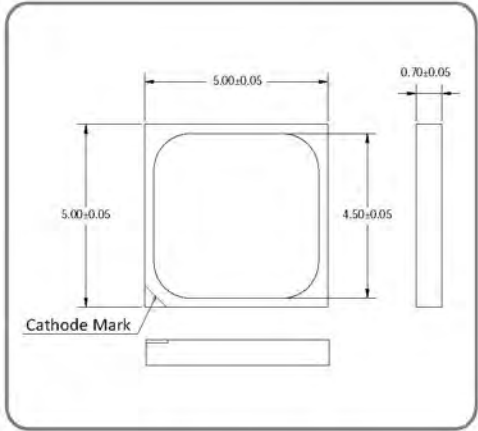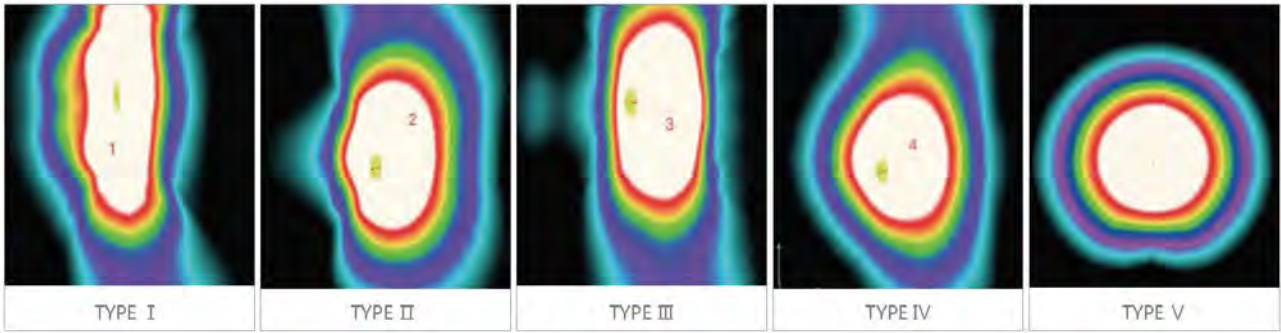

LED Chip Dimension

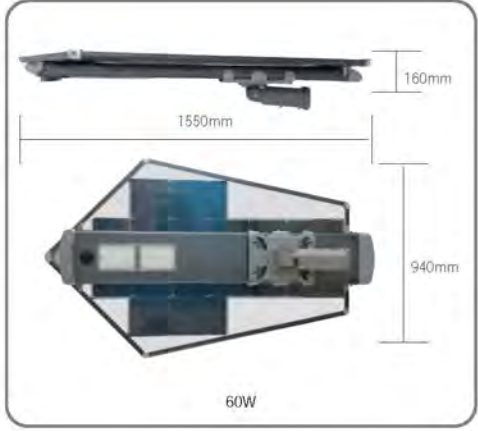

Lamp Dimension

FF-D
SOLAR FLOOD LIGHT







Application


- Billboards
- Stadiums
- Playgrounds
- Squares
- Monuments
- Bridges
- Parking lots
- Crossroad

Model	FF-15~FF-100
LED Power	15W-100W
CCT	2500K-6500K
Mono Solar Panel	50W/18V-200W/36V
LiFePO4 Lithium Battery	230.4WH/18AH 12.8V-921.6WH/36AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Optional Beam Angle

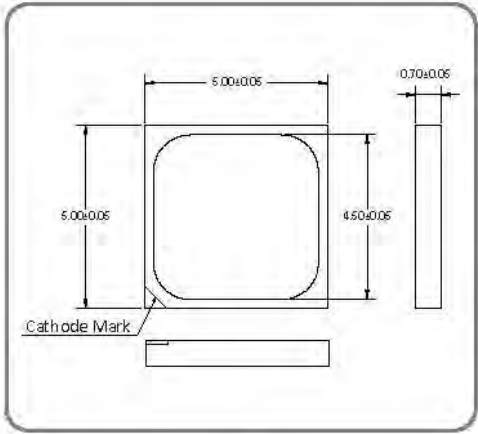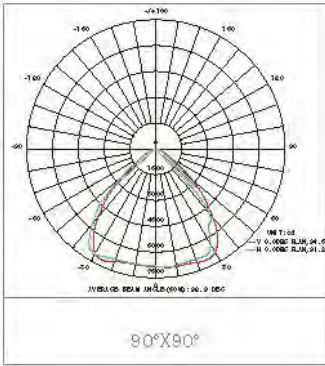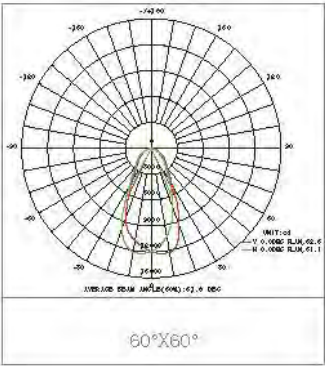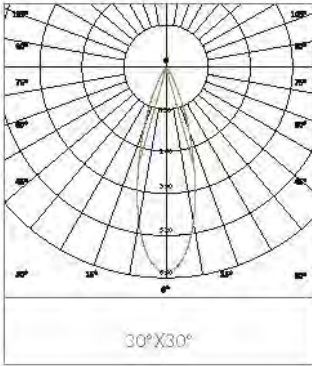

LED Chip Dimension

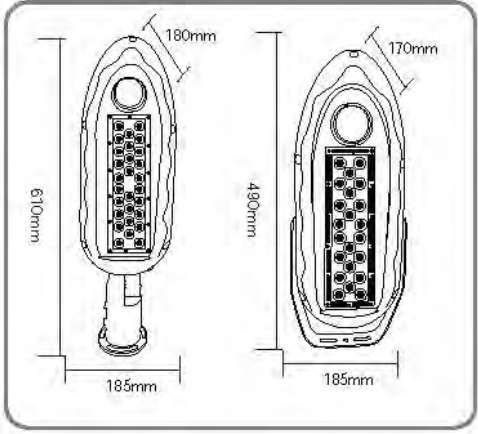



Lamp Dimension

BM-D
SOLAR FLOOD LIGHT




Model	BM-60-BM-200
LED Power	60W-200W
CCT	2500K-6500K
Mono Solar Panel	120W/36V-500W/36V
LiFePO4 Lithium Battery	768WH/30AH 25.6V-2150.4WH/84AH 25.6V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP68
Warranty	10 Years

Optional Beam Angle

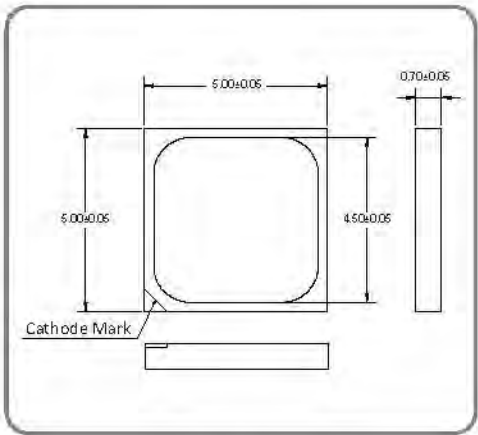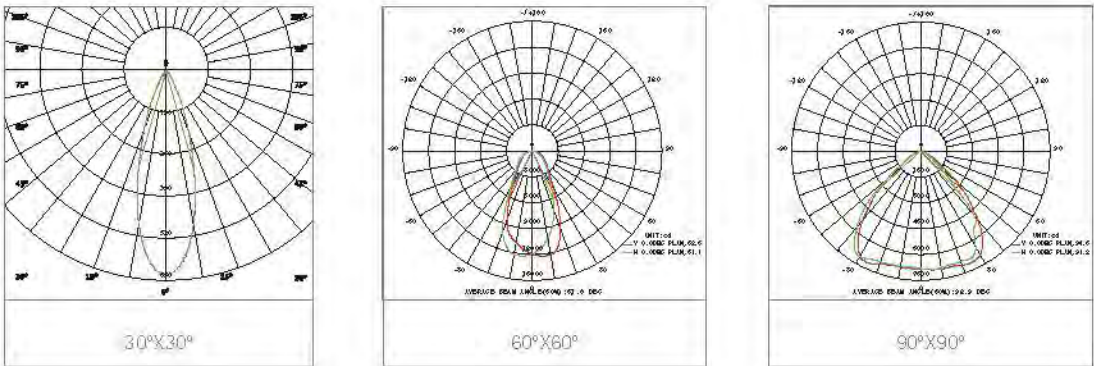

LED Chip Dimension

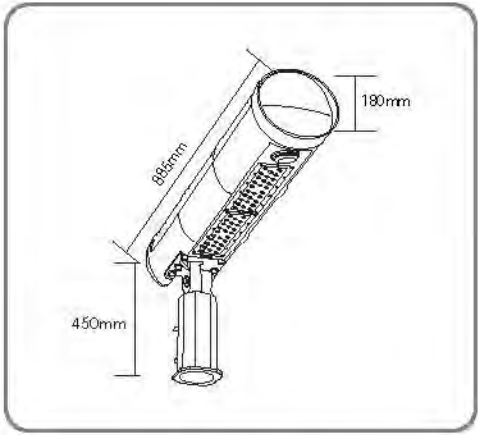

Lamp Dimension

SNM SERIES SOLAR STREET LIGHT WITH CAMERA

SNM-30
 LED Power: 30W
 Battery: 42AH 12.8V
 Solar Panel: 120W 18V
 Mounting Height: 6M



SNM-60
 LED Power: 60W
 Battery: 42AH 25.6V
 Solar Panel: 200W 36V
 Mounting Height: 8M

SNM SERIES SOLAR POWERED CAMERA SYSTEM

SNM-9080
 Battery: 80AH 12.8V
 Solar Panel: 100W 18V
 Mounting Height: 6M

SNM-9050
 Battery: 50AH 12.8V
 Solar Panel: 100W 18V
 Mounting Height: 4M



360° rotating



Support mobile & computer



30X zoom



Waterproof design

Full
HD

8MP



4G version & WIFI version

Remote view from anywhere

Remote view from anywhere



More Reliable than Grid Power

· Guaranteed to operate 24hrs/day, 365days/year

Robust

· Made of non-corrosive aluminum that never rusts

Sleek

· Integrated design is also aesthetically pleasing

MOON SERIES

SOLAR GARDEN LIGHT




Application

- Village
- Residential Areas
- Tourist Attractions
- Parks and Plazas
- Parking Lots
- Schools and Campuses

Model	BS-ML-6-BS-ML-12
LED Power	6W-12W
CCT	2500K-6500K
Mono Solar Panel	12W/5V-40W/5V
LiFePO4 Lithium Battery	32WH/10AH 3.2V-96WH/30AH 3.2V
Charge controller	MPPT high efficiency 97%
Motion sensor	Microwave
IP rate	IP65
Warranty	10 Years

Lamp Dimension

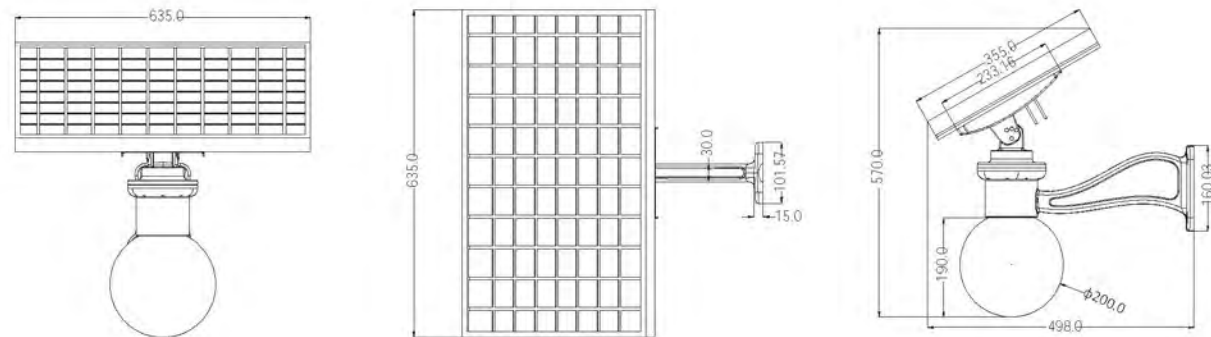

BS-ML-12 dimension

Project Case



Kazakhstan / 12W



Mexico / 12W



Puerto Rico / 12W

WHIRLWIND SERIES

ALL IN ONE SOLAR LIGHTING COLUMN

Beautify cities, campus, parks and residential areas



Application areas

City center

- Commercial plaza
- Shopping mall
- Landmark
- Sidestreet

Campus

- Cycle path & footpath
- Parking area


Park

- Pedestrian crossing
- Cycle path & footpath
- Landscape

Residential area


- Residential street
- Pedestrian crossing
- Cycle path & footpath
- Roundabout

POLE SERIES

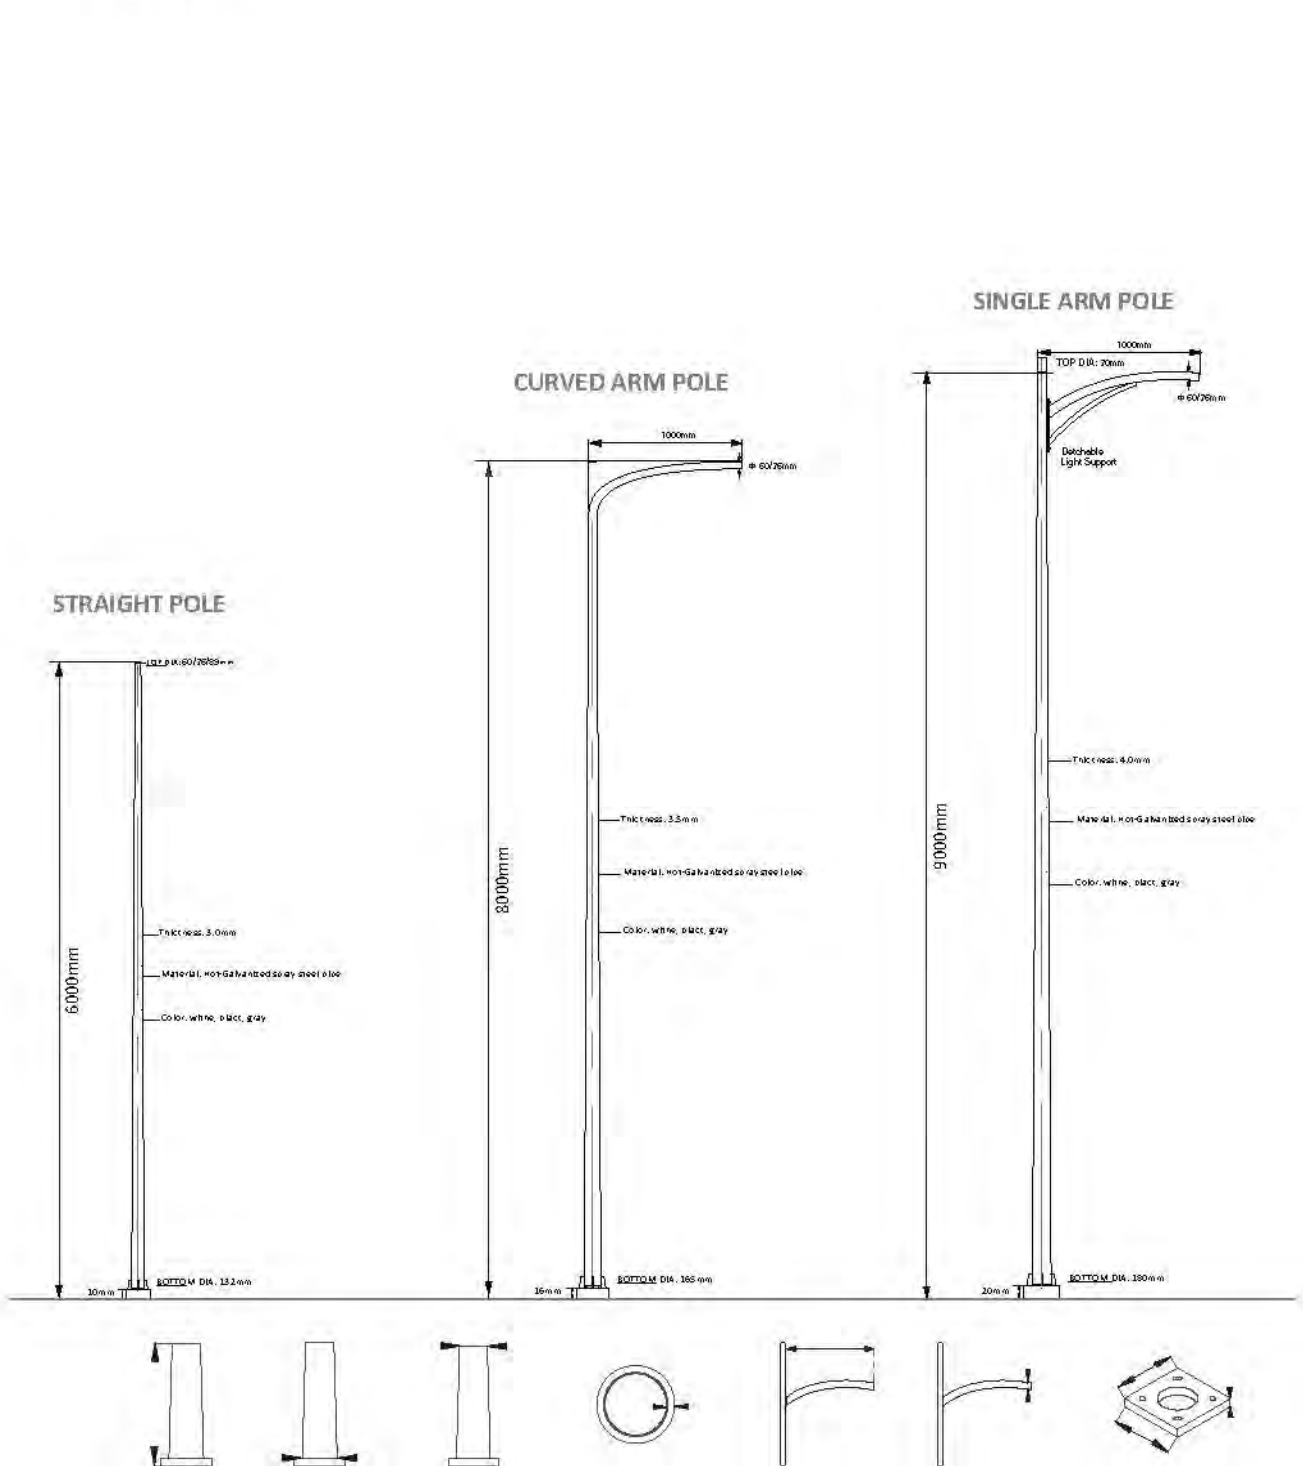

ITEM#	Height (m)	Bottom Dia (mm)	Top Dia (mm)	Wall Thickness (mm)	Arm Length (mm)	Arm Dia (mm)	Base Plate Size (mm)
BS-P4	4	114	60	2.5	500-1500	60/76	220*220*8
BS-P5	5	120	60	3.0			250*250*10
BS-P6	6	132	60	3.0			250*250*10
BS-P7	7	142	65	3.0			280*280*16
BS-P8	8	165	70	3.5			300*300*16
BS-P9	9	180	70	4.0			320*320*20
BS-P10	10	190	80	4.5			350*350*20
BS-P11	11	190	80	4.5			350*350*20
BS-P11.8	11.8	210	90	5.0			400*400*22

HIGH-LOW ARM POLE

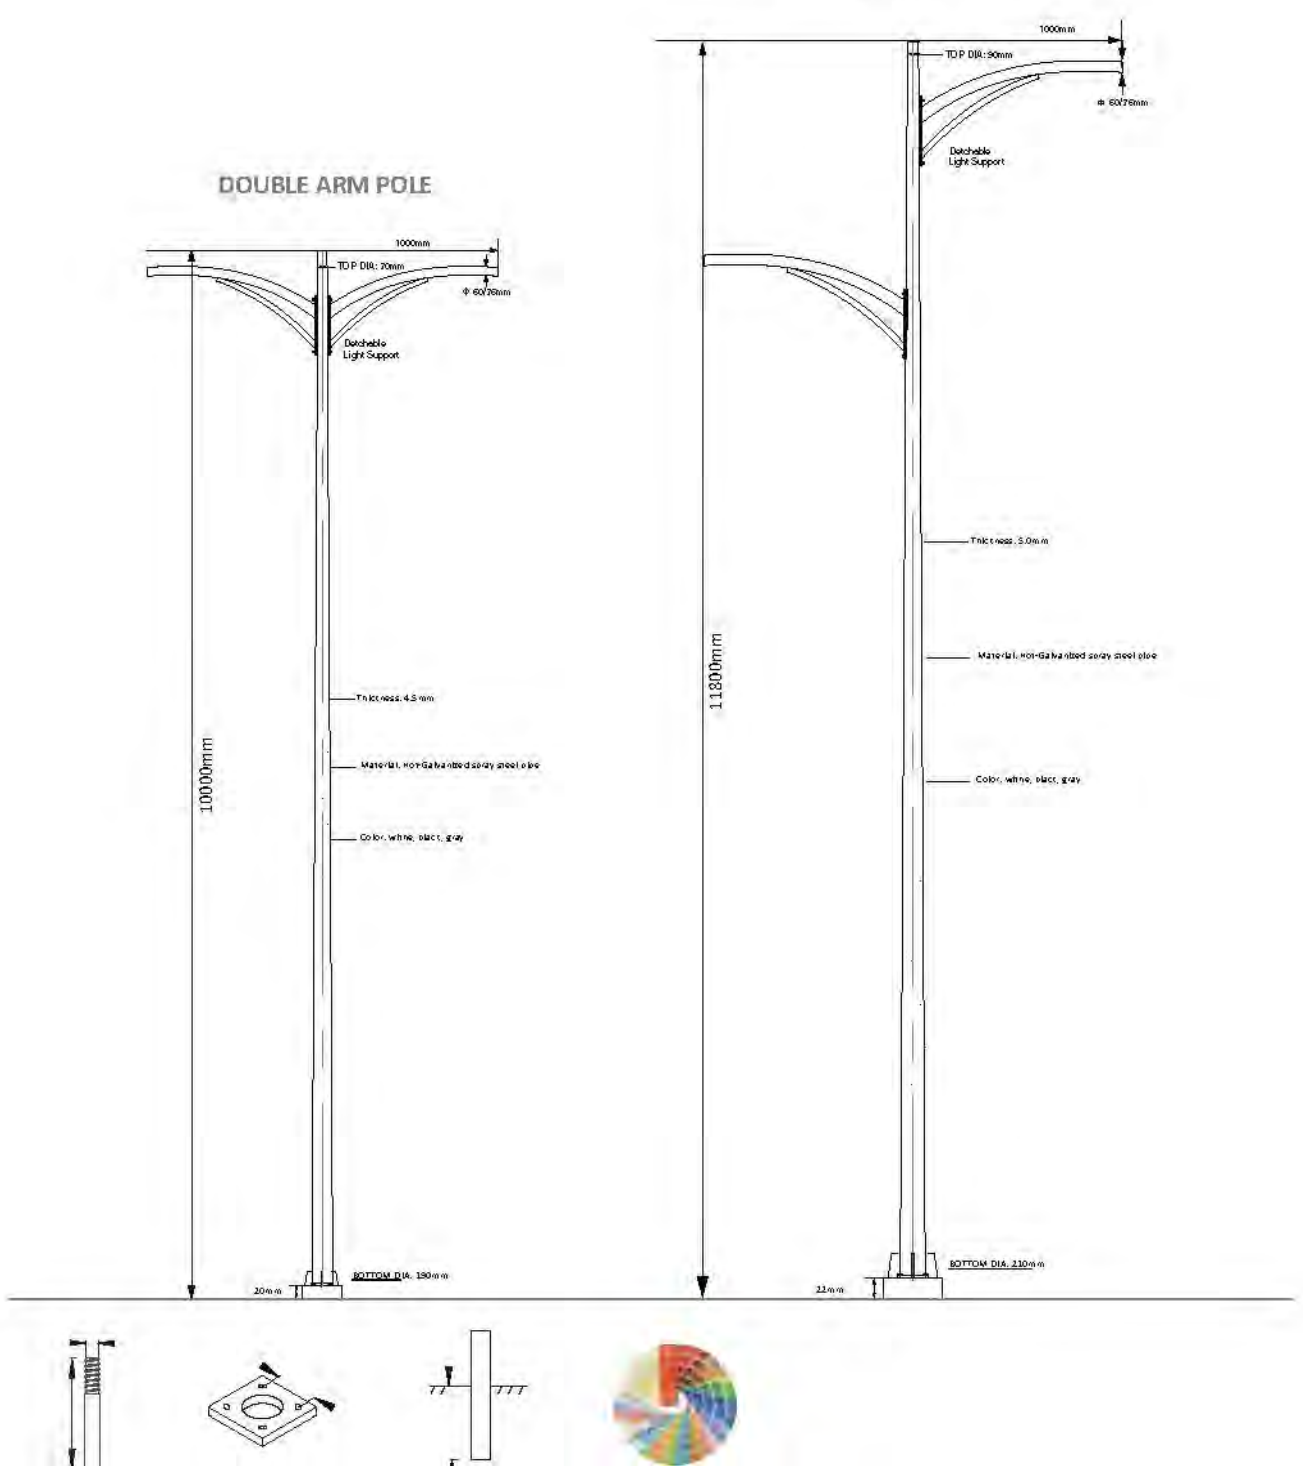


Bolt Size (mm)	Bolt Circle (mm)	Embedding (mm)	Color	Material	Surface Finish	Accessory
4*M14	160*160	160*160*350	Customized	Hot-Galvanized steel pipe	Satin Brushed Anodized PowderCoating	See Accessories Section
4*M14	180*180	180*180*500				
4*M14	180*180	180*180*500				
4*M16	220*220	220*220*600				
4*M16	240*240	240*240*800				
4*M24	260*260	260*260*800				
4*M24	280*280	280*280*900				
4*M24	280*280	280*280*900				
4*M24	300*300	300*300*1000				


SOLAR LIGHTING SOLUTION

Wireless Solar Street Light Management System

-  Remote turn on/ turn off
-  Support PC & Mobile
-  Real-time view of historical data
-  Automatic fault reporting
-  GPS Accurate positioning
-  Modification of working mode, working hours, brightness

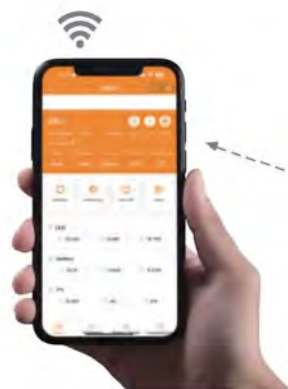


This web management platform provides an overview on solutions localization and data collected.

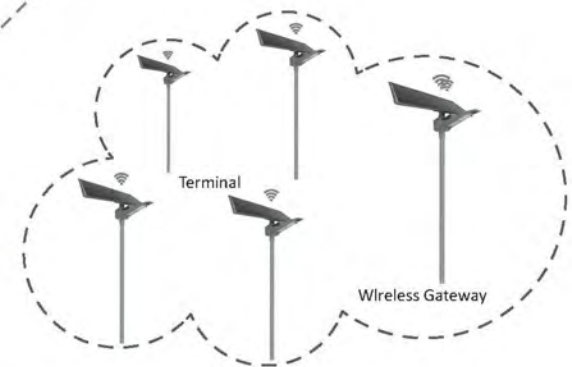

1 Solar With Hybrid System

Utility power complementary is the combination of AC and DC power to ensure that when one power source fails, the other can supply power in time to ensure the stable operation of equipment. Solar power is usually given priority, and when solar power is exhausted, it is automatically switched to the utility power.

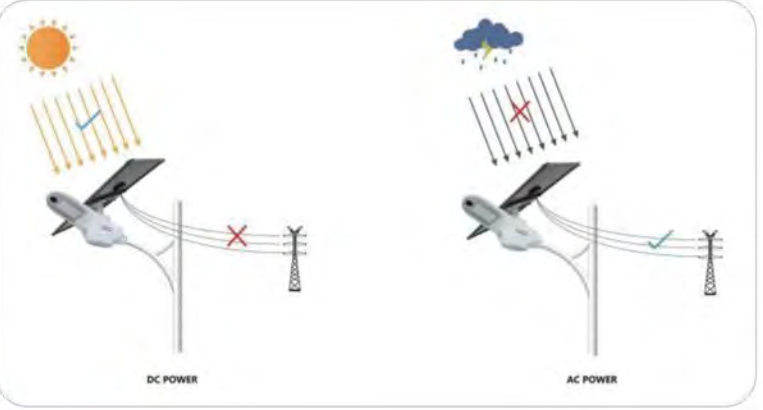


2 Solar Wind Street Light

The Solar Wind Street Light System not only utilizes solar power during the daytime, but also wind power to provide lighting in places where there is no electricity supply. It is suitable for the countries with high latitude and wind.

3 Solar Powered CCTV Camera

Solar surveillance system is a kind of surveillance equipment using solar energy as a power source, widely used in transportation, remote areas, farmland, public safety and other fields, especially suitable for application scenarios that require long-term monitoring in areas without stable power supply.

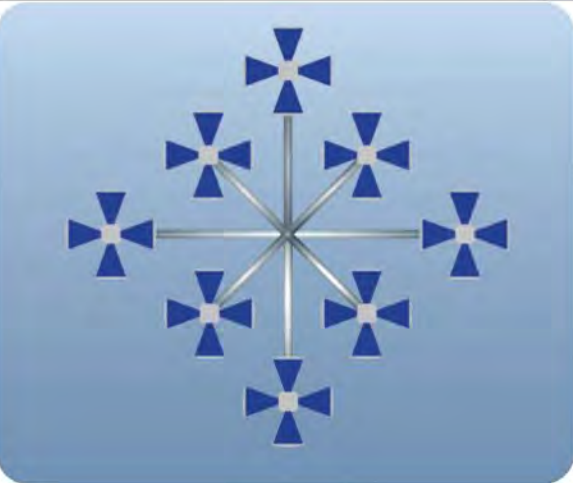

4 ODM Mold Design

professional design team has strong customized product design capabilities and is able to provide personalized solutions based on customers' specific needs and application scenarios.


PROJECT CASE



SW SERIES
Power: 100W
Installation Height: 11M
CCT: 2700K
Quantity: 1818pcs




FP SERIES
Power: 40W
Installation Height: 8M
CCT: 6000K
Quantity: 3680pcs

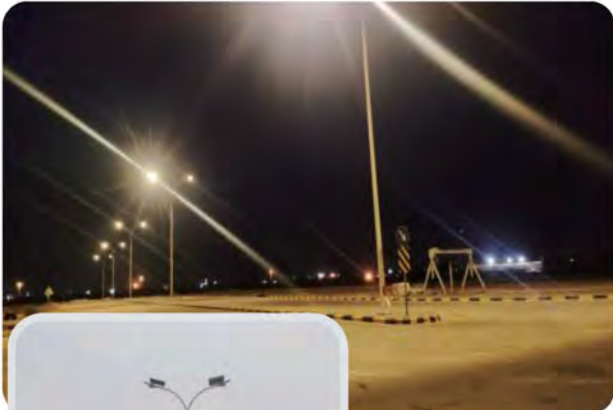


SW SERIES
Power: 80W
Installation Height: 10M
CCT: 2700K
Quantity: 1660pcs



SW SERIES
Power: 80W
Installation Height: 12M
CCT: 6000K
Quantity: 1923pcs

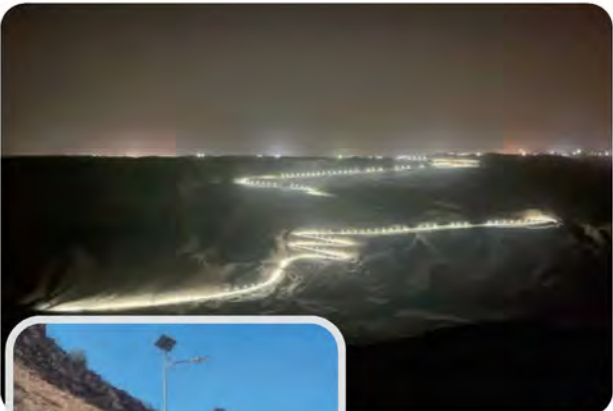

SN SERIES
Power: 60W
Installation Height: 9M
CCT: 6000K
Quantity: 1450pcs

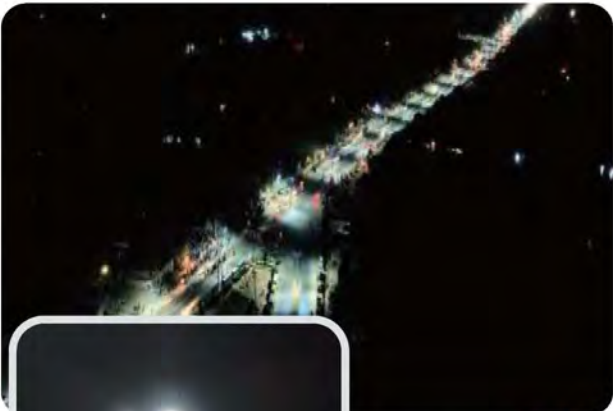

P SERIES
Power: 100W
Installation Height: 9M
CCT: 6000K
Quantity: 1319pcs



FP SERIES
Power: 20W
Installation Height: 6M
CCT: 6000K
Quantity: 1970pcs



FP SERIES
Power: 40W
Installation Height: 8M
CCT: 6000K
Quantity: 1512pcs



