


Cat® G3520C

Natural Gas Generator Sets

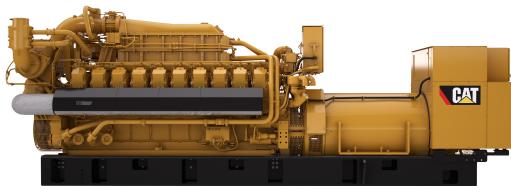

Bore – mm (in)	170 (6.7)
Stroke – mm (in)	190 (7.5)
Displacement – L (in ³)	86.0 (5266)
Aspiration	Turbocharged
Fuel System	Electronic Fuel Control Valve

Image shown may not reflect actual configuration

	Fuel Type	ekW (kVA)	Compression Ratio	Engine Speed – rpm
Continuous 50 Hz (ADEM™ A3 W/IM)	Natural Gas	1972 (2466)	11.3:1	1500
Continuous 60 Hz (ADEM™ A3)	Natural Gas	1600 (2000)	11.3:1	1200
Continuous 60 Hz (ADEM A3™ W/IM)	Natural Gas	2050 (2563)	11.3:1	1800

Standard Features

Cat® Engine

- Robust high speed block design provides prolonged life and lower owning and operating costs
- Designed for maximum performance on low pressure gaseous fuel supply
- Simple open chamber combustion system for reliability and fuel flexibility
- High percentage of component commonality with diesel engines
- Conservative power density for reliability and long operational life span

Generator Set Package

- Reliability verified through torsional vibration, fuel consumption, oil consumption, transient performance, and endurance testing

Alternators

- High-efficiency design
- Superior motor starting capability minimizes need for oversizing generator
- Designed to match performance and output characteristics of Cat engines

Applications

- Caterpillar generator sets are capable of maximizing power production opportunities in an extensive range of industries

EMCP 4 Control Panels

- User-friendly interface and navigation
- Scalable system to meet a wide range of installation requirements
- Expansion modules and site specific programming for specific customer requirements

Warranty

- 24 months/1000-hour warranty for standby ratings
- 12 months/unlimited hour warranty for continuous ratings
- Extended service protection is available to provide extended coverage options

Worldwide Product Support

- Cat dealers have over 1,800 dealer branch stores operating in 200 countries
- Your local Cat dealer provides extensive post-sale support, including maintenance and repair agreements

Financing

- Caterpillar offers an array of financial products to help you succeed through financial service excellence
- Options include loans, finance lease, operating lease, working capital, and revolving line of credit
- Contact your local Cat dealer for availability in your region

Optional Equipment

Engine	Generators	Control System
Air Cleaner	Output voltage	Controller
<input type="checkbox"/> Regular duty - shipped loose <input type="checkbox"/> Heavy duty - shipped loose	<input type="checkbox"/> 380V <input type="checkbox"/> 6900V <input type="checkbox"/> 600V <input type="checkbox"/> 400V <input type="checkbox"/> 10000V <input type="checkbox"/> 2400V <input type="checkbox"/> 415V <input type="checkbox"/> 10500V <input type="checkbox"/> 4160V <input type="checkbox"/> 3300V <input type="checkbox"/> 11000V <input type="checkbox"/> 12470V <input type="checkbox"/> 6300V <input type="checkbox"/> 440V <input type="checkbox"/> 13200V <input type="checkbox"/> 6600V <input type="checkbox"/> 480V <input type="checkbox"/> 13800V	<input type="checkbox"/> EMCP 4.3 <input type="checkbox"/> EMCP 4.4
Cooling System	Temperature Rise (over 40°C ambient)	Attachments
<input type="checkbox"/> JW & SCAC engine driven pumps <input type="checkbox"/> RH JW outlet flange <input type="checkbox"/> ANSI / DIN flanges	<input type="checkbox"/> 105°C <input type="checkbox"/> 80°C	<input type="checkbox"/> Discrete I/O module <input type="checkbox"/> Load share module <input type="checkbox"/> Local annunciator module <input type="checkbox"/> Remote annunciator module <input type="checkbox"/> Remote monitoring software
Exhaust System	Attachments	Vibration Isolators
<input type="checkbox"/> Elbows <input type="checkbox"/> Expanders <input type="checkbox"/> Flanges <input type="checkbox"/> Flexible fittings	<input type="checkbox"/> Anti-condensation heater <input type="checkbox"/> Generator RTD module <input type="checkbox"/> Neutral Ground (LV) <input type="checkbox"/> Cross-Current CT (HV) <input type="checkbox"/> Differential CTs (HV) <input type="checkbox"/> Diode fault detector (HV) <input type="checkbox"/> Air cleaner (HV) <input type="checkbox"/> Auto/manual control (HV)	<input type="checkbox"/> Rubber <input type="checkbox"/> Spring <input type="checkbox"/> Seismic rated
Fuel System	Power Termination	Certifications
<input type="checkbox"/> Fuel filter <input type="checkbox"/> Gas regulator	<input type="checkbox"/> IEC Bus bar (LV) <input type="checkbox"/> Circuit breaker (LV)	<input type="checkbox"/> 2006/42/EC & 2006/95/EC Declaration of Incorporation <input type="checkbox"/> Grid Code Compliance (Germany) <input type="checkbox"/> Eurasian Conformity (EAC) <input type="checkbox"/> Turkish Ministry Compliance
General	Circuit Breaker Options	Enclosure
<input type="checkbox"/> Barring group	<input type="checkbox"/> 4000A <input type="checkbox"/> UL <input type="checkbox"/> IEC <input type="checkbox"/> 3-pole <input type="checkbox"/> 4-pole <input type="checkbox"/> Manually operated <input type="checkbox"/> Electrically operated	<input type="checkbox"/> Weather protective <input type="checkbox"/> Sound attenuated
Lubrication	Trip Unit Options	Attachments
<input type="checkbox"/> Lubricating oil (NGEO) <input type="checkbox"/> Oil level regulator <input type="checkbox"/> Positive crankcase ventilation <input type="checkbox"/> Electric prelube	<input type="checkbox"/> LSI <input type="checkbox"/> LSI-G <input type="checkbox"/> LSIG-P	<input type="checkbox"/> Cold weather bundle <input type="checkbox"/> DC lighting package <input type="checkbox"/> AC lighting package <input type="checkbox"/> Motorized louvers
Mufflers	Cat Connect	Ancillary Equipment
<input type="checkbox"/> Industrial Grade (15dB) <input type="checkbox"/> Residential Grade (18dB) <input type="checkbox"/> Critical Grade (25dB) <input type="checkbox"/> Spark Arresting	Connectivity	<input type="checkbox"/> Automatic transfer switch (ATS) <input type="checkbox"/> Uninterruptible power supply (UPS) <input type="checkbox"/> Paralleling switchgear <input type="checkbox"/> Paralleling controls
Protection System	<input type="checkbox"/> Ethernet <input type="checkbox"/> Satellite <input type="checkbox"/> Cell	
<input type="checkbox"/> Explosion relief valves		
Starting/Charging		
<input type="checkbox"/> Charging alternator - 60A <input type="checkbox"/> Battery charger - 20A <input type="checkbox"/> Oversized batteries <input type="checkbox"/> Battery cables / racks <input type="checkbox"/> Airstarters <input type="checkbox"/> Jacket water heater		

Note: Some options may not be available on all models. Certifications may not be available with all model configurations. Consult factory for availability.

50 Hz Standard Package Performance – AC and JW Pumps

Performance		Continuous		Continuous	
Frequency		50 Hz		50 Hz	
Genset power rating @ 0.8 power factor – ekW (kVA)		1972	(2466)	1972	(2466)
Engine speed – rpm		1500		1500	
Compression ratio		11.3		11.3	
Emissions – mg/Nm ³ (g/bhp-hr) NOx		250	(0.53)	500	(1.0)
Performance number		EM0115-04		EM0114-04	
Fuel Consumption					
100% load with fan – MJ/ekW-hr (Btu/ekW-hr)		9.25	(8769)	9.05	(8583)
75% load with fan – MJ/ekW-hr (Btu/ekW-hr)		9.54	(9043)	9.34	(8851)
50% load with fan – MJ/ekW-hr (Btu/ekW-hr)		10.10	(9576)	9.89	(9373)
Cooling System					
Auxiliary circuit temperature (maximum inlet) – °C (°F)		54	(130)	54	(130)
Jacket water temperature (maximum outlet) – °C (°F)		99	(210)	99	(210)
Inlet Air					
Combustion air inlet flow rate (0°C, 101.3 kPa)/(77°F, 14.7 psia) – Nm ³ /bkW-hr (ft ³ /min)		4.32	(5693)	4.19	(5522)
Altitude Capability					
At 25°C (77°F) ambient, above sea level – m (ft)		950	(3117)	1454	(4770)
Exhaust System					
Exhaust temperature – engine outlet – °C (°F)		471	(880)	472	(881)
Exhaust gas flow (0°C, 101.3 kPa)/(77°F, 14.7 psia) – Nm ³ /bkW-hr (ft ³ /min)		4.59	(15299)	4.45	(14859)
Exhaust gas mass flow – kg/bkW-hr (lb/hr)		5.78	(26133)	5.61	(25353)
Heat Rejection					
Heat rejection to jacket water – kW (Btu/min)		631	(35881)	619	(35200)
Heat rejection to exhaust (LHV to 120°C/248°F) – kW (Btu/min)		1235	(70232)	1198	(68143)
Heat rejection to auxiliary circuit – kW (Btu/min)		154	(8762)	147	(8374)
Heat rejection to atmosphere from engine and generator – kW (Btu/min)		217	(12322)	217	(12322)
Heat rejection to jacket water circuit (JW+OC+AC1) kW (Btu/min)		1101	(62592)	1058	(60136)


60 Hz Standard Package Performance – AC and JW Pumps

Performance		Continuous		Continuous	
Frequency		60 Hz		60 Hz	
Genset power rating @ 0.8 power factor – ekW (kVA)		1600	(2000)	1600	(2000)
Engine speed – rpm		1200		1200	
Compression ratio		11.3		11.3	
Emissions – mg/Nm ³ (g/bhp-hr) NOx		225	(0.50)	459	(1.00)
Performance number		DM5856-04		DM5855-04	
Fuel Consumption					
100% load with fan – MJ/ekW-hr (Btu/ekW-hr)		9.46	(8967)	9.07	(8600)
75% load with fan – MJ/ekW-hr (Btu/ekW-hr)		9.81	(9302)	9.41	(8919)
50% load with fan – MJ/ekW-hr (Btu/ekW-hr)		10.53	(9987)	10.10	(9573)
Cooling System					
Auxiliary circuit temperature (maximum inlet) – °C (°F)		54	(130)	54	(130)
Jacket water temperature (maximum outlet) – °C (°F)		99	(210)	99	(210)
Inlet Air					
Combustion air inlet flow rate (0°C, 101.3 kPa)/(77°F, 14.7 psia) – Nm ³ /bkW-hr (ft ³ /min)		4.73	(5089)	4.43	(4765)
Altitude Capability					
At 25°C (77°F) ambient, above sea level – m (ft)		791	(2594)	975	(3200)
Exhaust System					
Exhaust temperature – engine outlet – °C (°F)		413	(776)	424	(796)
Exhaust gas flow (0°C, 101.3 kPa)/(77°F, 14.7 psia) – Nm ³ /bkW-hr (ft ³ /min)		5.00	(12550)	4.68	(11954)
Exhaust gas mass flow – kg/bkW-hr (lb/hr)		6.31	(23303)	5.91	(21840)
Heat Rejection					
Heat rejection to jacket water – kW (Btu/min)		481	(27360)	472	(26869)
Heat rejection to exhaust (LHV to 120°C/248°F) – kW (Btu/min)		956	(54340)	931	(52957)
Heat rejection to auxiliary circuit – kW (Btu/min)		145	(8242)	132	(7527)
Heat rejection to atmosphere from engine and generator – kW (Btu/min)		187	(10612)	187	(10612)
Heat rejection to jacket water circuit (JW+OC+AC1) kW (Btu/min)		893	(51076)	834	(47448)

60 Hz Standard Package Performance – AC and JW Pumps

Performance		Continuous		Continuous	
Frequency		60 Hz		60 Hz	
Genset power rating @ 0.8 power factor – ekW (kVA)		2050	(2563)	1972	(2466)
Engine speed – rpm		1800		1800	
Compression ratio		11.3		11.3	
Emissions – mg/Nm ³ (g/bhp-hr NOx)		219	(0.50)	445	(1.00)
Performance number		EM0081-03		EM0080-03	
Fuel Consumption					
100% load with fan – MJ/ekW-hr (Btu/ekW-hr)		9.85	(9336)	9.57	(9078)
75% load with fan – MJ/ekW-hr (Btu/ekW-hr)		10.30	(9768)	10.02	(9505)
50% load with fan – MJ/ekW-hr (Btu/ekW-hr)		11.03	(10459)	10.73	(10175)
Cooling System					
Auxiliary circuit temperature (maximum inlet) – °C (°F)		54	(130)	54	(130)
Jacket water temperature (maximum outlet) – °C (°F)		90	(194)	90	(194)
Inlet Air					
Combustion air inlet flow rate (0°C, 101.3 kPa)/(77°F, 14.7 psia) – Nm ³ /bkW-hr (ft ³ /min)		4.63	(6386)	4.42	(6096)
Altitude Capability					
At 25°C (77°F) ambient, above sea level – m (ft)		152	(500)	375	(1230)
Exhaust System					
Exhaust temperature – engine outlet – °C (°F)		483	(901)	487	(909)
Exhaust gas flow (0°C, 101.3 kPa)/(77°F, 14.7 psia) – Nm ³ /bkW-hr (ft ³ /min)		4.91	(17400)	4.69	(16719)
Exhaust gas mass flow – kg/bkW-hr (lb/hr)		6.19	(29302)	5.91	(27994)
Heat Rejection					
Heat rejection to jacket water – kW (Btu/min)		644	(36635)	650	(36972)
Heat rejection to exhaust (LHV to 120°C/248°F) – kW (Btu/min)		1486	(84495)	1435	(81584)
Heat rejection to auxiliary circuit – kW (Btu/min)		113	(6444)	97	(5529)
Heat rejection to atmosphere from engine and generator – kW (Btu/min)		251	(14291)	253	(14395)
Heat rejection to jacket water circuit (JW+OC+AC1) kW (Btu/min)		1284	(73039)	1227	(69834)

Weights and Dimensions

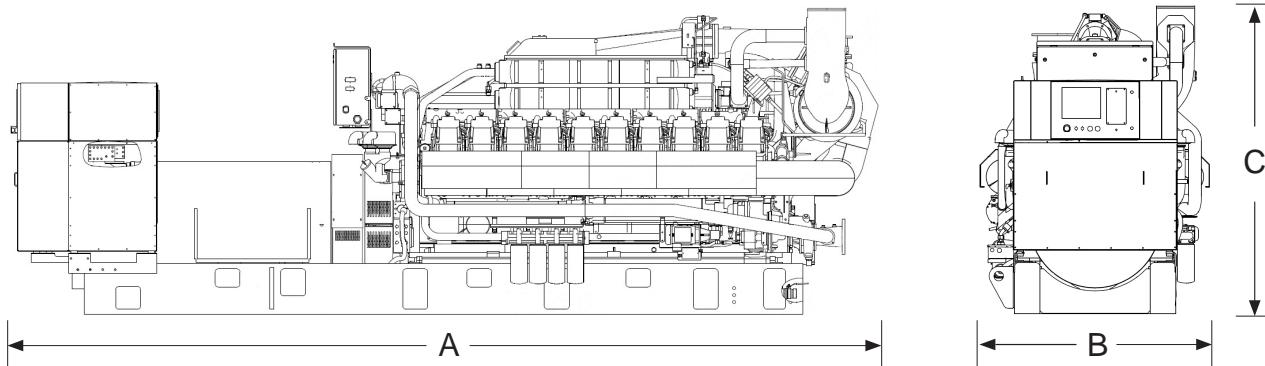

Dim "A" mm (in)	Dim "B" mm (in)	Dim "C" mm (in)	Dry Weight kg (lb)
6950.5 (273.6)	1830.3 (72.1)	2449.8 (96.5)	17826 (39306)

Note: For reference only. Do not use for installation design. Contact your local Cat dealer for precise weights and dimensions.

Ratings Definitions

Continuous Power Rating

Output available with non-varying load for an unlimited time. Average power output is 70-100% of the continuous power rating. Typical peak demand is 100% of continuous rated ekW for 100% of operating hours.

Applicable Codes and Standards

AS1359, CSA C22.2 No100-04, UL142, UL489, UL869, UL2200, NFPA37, NFPA70, NFPA99, NFPA110, IEC60034-1, ISO3046, ISO8528, NEMA MG1-22, NEMA MG1-33, 2006/95/EC, 2006/42/EC, 2004/108/EC.

Note: Codes may not be available in all model configurations. Please consult your local Cat dealer for availability.

Fuel Rates

1. For transient response, ambient, and altitude capabilities consult your local Cat dealer.
2. Fuel pressure range specified is to the engine fuel control valve. Additional fuel train components may be required and should be considered in pressure and flow calculations.
3. For a complete reference of definitions and conditions see the following data sheets
 - a. **60 Hz 1600ekW Continuous / Standard (W/ Pumps)**
DM5855-04 (1.0g/bhp-hr NOx) - SCAC IN/OUT:130/210°F
DM5856-04 (0.5g/bhp-hr NOx) - SCAC IN/OUT:130/210°F
 - b. **50 Hz 1972ekW Continuous / Standard (W/ Pumps)**
EM0114-04 (500mg/Nm³ NOx) - SCAC IN/OUT:130/210°F
EM0115-04 (250mg/Nm³ NOx) - SCAC IN/OUT:130/210°F
 - c. **60 Hz 2050ekW Standby / Standard (W/ Pumps)**
EM4131-00 (1.0g/bhp-hr NOx) - SCAC IN/OUT: 130/194°F
EM4132-00 (0.5g/bhp-hr NOx) - SCAC IN/OUT: 130/194°F
 - d. **60 Hz 2050ekW Continuous / Standard (W/ Pumps)**
EM0080-03 (1.0g/bhp-hr NOx) - SCAC IN/OUT: 130/194°F
EM0081-03 (0.5g/bhp-hr NOx) - SCAC IN/OUT: 130/194°F

<http://www.cat.com/powergeneration>

©2019 Caterpillar
All rights reserved.

Materials and specifications are subject to change without notice.
The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.